

1911 The world's firstexpansion plug John Rawlings invented and patented the first wall expansion plug. 1887 Rawlings Brothers Starting a small electrical engineering company in London, UK. 1919 Rawlplug Company Ltd Changing the company name to Rawlplug Company Ltd.

1930 Rawlhammer. The world's first patented hammerdrill.



1941 Rawlnut Shock and vibration proof fixing device. Spring Toggle . The world's first metal anchor for drywall. 1948 Rawlanchor World's first cavity interset fixing. 1969 R-OLD Launch of production of plastic expansion plugs in Glasgow, UK.

inical anchor, patented by Rawlplug.

1934 Rawlbolt. The wor

1980 Safety Plus. Heavy duty expansion anchors.

1998 ETA Certification Rawlplug became the first UK manufacturer with ETA.

2002 Stapling, Tacking and Gluing High efficency for site and DIY work.

2005 UNO® Plug. No.1 expansion plug in the UK. Simplicity and outstanding performance combined. Knowledge & competence development



to Mars



each sector of the uction industry

2007 CFS + Cartridge Free System. Cartridge free system for bonded anchors. 2010 Bonded anchors. Cartridge system for bonded anchors. No.1 expansion plug in the UK. Simplicity and outstanding performance combined. 2006 EasyFix. Professional calculation software. 2009 Direct Fastening Systems. For safer and quicker onsite jobs



anniversary on rawlplug.com

> Rawlplug® **Products**

BONDED ANCHORS

- Injection Cartridges Systems
 Polyester Resins
 Epoxy Resins
 Vinylester Resins
 Hybrid Resins
- CFS+ Cartridge Free System Vinylester Resins CFS+ Polyester Resins CFS+
- Capsules
 Hammer-In Vinylester Capsule
 Spin-In Vinylester Capsule
- Bonded Anchor Accessories





MECHANICAL ANCHORS

- Heavy Duty Expansion Anchors
- Shield Anchors
- Throughbolts
- Drop-in Anchors
- Concrete Screw Bolts
- Mechanical Anchors Accessories

LIGHTWEIGHT FIXINGS

- Frame Fixings
- Lightweight Metal Fixings
- Hammer Fixings
- Plastic Expansion Plugs
- Plasterboard Fixings
- Special Fixings





FAÇADE INSULATION FIXINGS

- Screw-in Façade Fixings
- Hammer-in Façade Fixings
- Washers
- Façade Insulation Accessories

ROOFING INSULATION FIXINGS

- Telescopic Sleeves
- Roofing Screws
 Screws for Concrete
 Screws for Steel
- Roofing Washers



PASSIVE FIRE PROTECTION SYSTEM, FOAMS, SEALANTS & ADHESIVES



- Fire Resistant Sealants
- Fire Resistant Mortars
- Firestop Board
- Firestop Wrap
- Foams

Gun Foams
Handheld Foams
Polyurethane Foam Mortars and Adhesives
Fire Resistant Foams
Foams Accessories

Sealants
 Silicones
 Roof Rubber Sealants
 Acrylics
 Sealants & Adhesives

DIRECT AND MANUAL FASTENING SYSTEMS

- Gas Actuated Products
- Pneumatic Products
- Powder Actuated products
- R-RAWL-RB39 Rebar Tier
- Stapling
 Professional Line 140
 Universal Line 53
 Yellow Line 13
 Cable Line 36
- Hot Melt Glue Guns
- Glue Sticks





POWER TOOL ACCESSORIES

- Drill Bits and Chisels
- Bits, Sockets and Adapters
- Sawing Accessories
- Diamond Discs
- Angle Grinder Cutting and Grinding Wheels
- Other Accessories



Our entire team is composed of actual experts in the field of fixing solutions. They are industry professionals with many years of experience in the vast area of construction engineering who have spent their whole professional life in close proximity of clients, never waiving any challenge at hand. The close collaboration and experience exchange between designers, contractors, salespeople and the international Rawlplug team turn the solutions we propose into genuine advisory. What's more - all services offered by Rawlplug are free of charge.

Design tools BIM EASYFIX





Technical library and product selector





Technical assistance







Tools for designers

Our portfolio comprises a set of complementary services and tools matching our products that, on the one hand, will make it easier for you to choose suitable fixing solution and design them correctly, and on the other hand, provide you with the information you will find indispensable for the future use. You are welcome to use:

EasyFix

Our original application dedicated to engineers and designers. This simple, yet multifunctional tool enables you to run calculations and develop designs using Rawlplug fixings. EasyFix is a guarantee of reliability and safety, since both the program itself and the calculations it delivers conform to the standards defined in European Technical Approval Guidelines (ETAG).



The state of the s

ON-LINE APPLICATION



An on-line application containing a comprehensive portfolio of models, plan views and technical drawings of Rawlplug fixings along with their full technical documentation. It enables you to use all of them in some of the most popular BIM/CAD environment software packages.

PRODUCT SELECTOR

Designed to make the choice of products matching your design's requirements easier and quicker. It is here that you can quickly view the full portfolio of criteria - from the type of substrate, a recommended application, approvals and certificates, materials and coatings, environmental conditions to an indication that a product is new in our offer. The presentation of each product includes a set of photos, drawings, technical models, video tutorials, data sheets, approvals and so on.

Fixings & Fasteners Selector





TECHNICAL LIBRARY

Contains technical documentation of products divided into as many as 15 categories. All you need to do is enter the name of the product and a list of all technical documents available in our library will appear in the search results.

Technical Assistance

Our team is ready to deliver comprehensive technical assistance. The range of services comprises:

- technical advisory,
- site testing,
- assistance in designing of fixings,
- technical FAQ.

TECHNICAL ADVISORY

Our clients are offered the support of an engineering team from the Technical Department. They are ready to answer all your questions pertaining to the design of fixings, the range of their applications, the installation process or the service of Rawlplug's products. You only need to fill in the Technical Request form on www.rawlpluq.com.



SITE **TESTING**

While running site tests, we make use of our signature standard, designed with reference to the requirements of British Standard BS:8539 as well as guidelines of the British Construction Fixings Association (CFA). It was our team of experts, being members of the Technical Committee, who developed these principles and who provide testing oversight.

ASSISTANCE IN DESIGNINGOF FIXINGS

We offer support for the extensive range of fixing design activities. Our team of engineers from the Technical Department is at your disposal. They will answer all your questions related to the design of fixings and their recommended applications. We encourage you to contact our experts on www.rawlplug.com.





TECHNICAL FAQ

Based on our experience to date, and thanks to the regular close relationship with our customers and understanding of the challenges they face on a daily basis, we have developed a list of the most typical issues and areas in the format of easily searchable questions and intuitive answers.

The list of the most frequently asked questions is available on www.rawlplug.com.



Rawlplug POS System

Presentation of Rawlplug's products is based on an integrated display system operating on 3 levels:

- Point of Sale product display system
- labelling
- packaging

What we offer in this scope is innovative across the market and provides us with unquestionable competitive edge. Not only does the POS product display system ensure formal attractiveness, but primarily stands for unparalleled functionality and intuitiveness whenever Rawlplug products are to be chosen from among hundreds of other items available on store shelves. And even more importantly, it supports the consumer in making the right choice.

When designing the POS system, we were guided by principles that reflect the real needs and behaviour of customers at the point of purchase. By that means we have managed to create features that are characteristic only for the Rawlplug product display system:

colour coding, key words, installation guidelines, QR codes, standard display system, customised display system, unique packaging, environmental sustainability

COLOUR CODING

products intended for specific substrates are marked with specific colours, enabling instantaneous choice of suitable products with this criterion in mind.

KEY WORDS

in order to describe our products we have used key words that users recognise intuitively, which significantly speeds up the choice of what one truly needs.

INSTALLATION GUIDELINES

simplicity of use is crucial to contractors, and we additionally allow them to quickly read and understand instructions thanks to icons and step-by-step type presentation models



QR CODES

every product packaging features a QR code the scanning of which provides you with access to videos and animations with installation instructions.

STANDARD **DISPLAY SYSTEM**

we can provide you with complete display systems ready for installation at points of sale, with all the features required to enable making appropriate and quick choice of products in demand.

CUSTOMISED **DISPLAY SYSTEM**

we also provide you with an opportunity to develop a customised display set based on individual, specific customer requirements, which is possible thanks to the modularity of our solutions as well as their adaptability to any size and layout of a specific shop.

UNIQUE PACKAGING

for every product, we have developed attractive, ergonomic and comfortable to use unique packaging.

ENVIRONMENTAL SUSTAINABILITY

our products are manufactured using sustainable technological standards which matter greatly to environmental protection.





Rawlplug Academy is an innovative development project intended for our clients. It is a unique venture across the industry, dedicated to education, competence building as well as knowledge and experience sharing, designed to reflect the actual needs of engineers and designers, contractors and salespeople. What you receive is a single point of access to an integrated training package that will not only help you in everyday operations, but also assist you in the development of your specialisation.

A state-of- the art knowledge and training platform

Courses available online – you study when and where you want



Varied forms of training



Courses
designed
in accordance
with both
business and
personal needs



4 types of training categories:

courses that develop products and services competences, operating systems skills and legally required courses









Enhance your knowledge, master new skills

Every course concludes with a test



www.rawlplugacademy.com



- Under the Rawlplug Academy, we perform three types of training activities:
 - Rawlplug Academy's original training courses devised to reflect the operating needs of our customers,
 - vocational training courses conducted under prestigious country-specific educational programmes,
 - video tutorials collected in a library of training videos and animations.

ORIGINALTRAINING COURSES

The Rawlplug Academy original training scheme comprises series of specialised courses, soon to be available to our online clients as well.



I○**RAWLPLUG** Academy %







VOCATIONALTRAINING COURSES

Being a professional partner who provides clients with integrated education and knowledge sharing services, we extend our Rawlplug Academy related activities by participating in development programmes whose purpose is to expand specialised qualifications and improve field-specific competencies. This is why our experts have become personally engaged in developing training courses and workshops under the Continuing Professional Development scheme and BS:8539.

CPD Seminars

Specialists representing the Rawlplug team take part in various initiatives, tutoring industry-specific seminars, co-moderating major conferences and events relevant to the sector as well as organising practical workshops aimed at improving participants' competencies in terms of professional choice and applications of fixing and fastening solutions. In this milieu, we collaborate with such parties as the Institution of Civil Engineers (ICE) and the Institution of Structural Engineers (IStructE). Each person taking part in the CPD seminars run by experts from Rawlplug Ltd. acquires qualifications documented with a certificate that proves to be a significant add-on to a professional portfolio.

BS:8539 COURSES

Rawlplug Ltd. is a certified member of the Construction Fixings Association (CFA). The membership is indeed a prestigious achievement, but it also an obligation. That is why, we organise and conduct seminars and workshops in line with British Standard BS:8539. This means that as we deliver training we always rely on the best available practices. Participation in BS:8539 courses is certified, which enables the participant to formally confirm the qualifications and competencies thus acquired.

VIDEO TUTORIALS

Based on many years of observations of the processes and activities connected with everyday operations performed by our clients, we have developed scripts for video tutorials. How do they work? We teach you how to choose the best fixing solutions. We demonstrate where and under what circumstances they should be applied. We present how to use them under real-life conditions. And the entire content is delivered in a simple, intuitive and comprehensible manner. You are welcome to use the library of Rawlplug's video tutorials.





Admiring spectacular structures known all over the world, we are delighted with their beauty, splendour and functionality. And we are delighted that we can offer you the highest reliability, durability and aesthetics thanks to the application of Rawlplug® products. There are millions of fasteners and anchors, the appropriate selection of which allows you to admire the beauty, and to ensure the safe use safely use, of the facilities that are visited by thousands of people every day.



















We are proud that our products facilitate your work and increase comfort, effectiveness and quality of work,

meeting even the most specific and ambitious needs of our Customers. And we want to share this pride with you. Every year, our portfolio is extended with new investments that allow us to carry out the mission of Rawlplug, i.e. to provide the state-of-the-art reliable solutions.

















:			20
	CE	T	21
	C€	шшш	22
	CE	шшш	2:
		PRAMERIE	2
			2.
	kiwa N RoHS	Q.	2
	RoHS		2
	RoHS	1	2
	RoHS	6	2
	RoHS	D	3
			3
			3
	RoHS	P	3
	RoHS	A STATE OF THE PARTY OF THE PAR	3
		1	3
	RoHS		3
	RoHS	_	3
	CE	S	3
S			3
		The state of the s	4
R TIMBER			4
	C€	7	4
	NOT THE REPORT OF THE PROPERTY	C E C E C E C E C E C E C E C E C E C E	C E C E C E C E C E C E C E C E C E C E



Contents				
R-RAWL-GMC38 GAS POWERED METAL CONECTOR NAILER		C€	T	4
R-RAWL-A2064 GAS POWERED BRAD NAILER - ANGLED		тü∨ (€	T	4
R-RAWL-B1664 GAS POWERED BRAD NAILER - STRAIGHT		тü∨ С€	T	4
NAILS AND CONSUMABLES				4
R-DPG, R-DPGH-3190, R-DPHDG-3190 PAPER COLLATED NAILS WITHOUT FUEL CELLS		C€	MANUEL PROGRAMME TRANS	F 4
R-DPK PAPER COLLATED NAILS WITHOUT FUEL CELLS		C€	MATIC PROCESS THE	7
R-DRG PAPER COLLATED NAILS WITHOUT FUEL CELLS		C€	MANUEL PROMINE PROM	7
R-DRGH PAPER COLLATED NAILS WITHOUT FUEL CELLS		C€	MARIE PROGREE PROF	-
R-DRHDG PAPER COLLATED NAILS WITHOUT FUEL CELLS		CE	MATERIAL PROPERTY.	F 4
R-DRK PAPER COLLATED NAILS WITHOUT FUEL CELLS		C€	MAPIE PRINCIPLE PROP	5
R-DRS PAPER COLLATED NAILS WITHOUT FUEL CELLS		C€	MANUEL PRANCILLE PROP	F 5
R-HDGT-3838 PAPER COLLATED JOIST HANGER NAILS		C€		ŗ
ANGLED BRAD NAILS AND STRAIGHT BRAD NAILS BRAD NAILS				7
FUEL CELLS				5
R-RAWL-GP1 FUEL CELL			WIPLUG FUEL CELL	
R-KIT -WW90/SC40 CLEANING KIT				į.
PNEUMATIC TOOLS				5
R-RAWL-PN-3490 PNEUMATIC FRAMING NAILER		CE	W,	
SPG-DPG, SPG-DPGH, SPG-DPK, SPG-DRG, SPG-DRGH, SPG-PAPER COLLATED NAILS WITHOUT FUEL CELLS	DRK 🥡 🧼	C€	MARIE FRANCE FRAN	7
R-RAWL-PNP-130 PNEUMATIC FRAMING NAILER		CE	A.	
R-GPG PLASTIC COLLATED NAILS		C€		
R-RAWL-PN PNEUMATIC COIL NAILER		C€	T	(
R-GDP WIRE COLLATED NAILS				(
R-RAWL-PRN-45 PNEUMATIC ROOFING NAILER		CE	XT	•

Contents				
COMPRESSORS				66
R-RAWL-C100-P C100-P OIL LUBRICATED COMPRESSOR		C€		67
R-RAWL-C20-PRO OIL LUBRICATED COMPRESSOR		C€		68
R-RAWL-C24 C24 OIL LUBRICATED COMPRESSOR		C€		69
R-RAWL-C50 C50 OIL LUBRICATED COMPRESSOR		CE		70
R-RAWL-C50-10 C50-10 OIL LUBRICATED COMPRESSOR		C€	}	71
R-RAWL-C6 C6 OIL FREE COMPRESSOR		C€		72
STAPLERS				73
RT-KGR0010 Hand stapler – Standard, 6-10 mm	S RLIS		6	74
RT-KGR0011 Hammer Tacker 6-10 mm	Rise Rise		.2=	75
RT-KGR0012 Hammer Tacker – Roofing 6-10 mm	RL13			76
RT-KGR0013 Hammer Tacker – Roofing pro 6-14 mm	1 R1140		3	77
RT-KGR0014 Hand stapler – Trade, 6-10 mm	3 R.140			78
RT-KGR0024 Hand stapler – Universal Trade 3 in 1, 6-14 mm				79
RT-KGR0027 Hand stapler – Cable tacker, 10-14 mm	(3) R136		13	80
RT-KGR0029 Hand stapler – Powerful easy shot 3 in 1, 6-14 mm	RLS		10	81
RT-KGR0030 Hand stapler – Easy shot 3 in 1, 6-14 mm	RLS RLS RL9 RL9 RL9		6	82
RT-KGR0031 Hand stapler – 3 in 1, 6-14 mm	RLS RLS RLS RLS RLS RLS RLS			83
RT-KGR0032 Hand stapler – Household, 6-14 mm	RLS3 Ext nm.			84
RT-KGR0033 Hand stapler – Extra light, 6-14 mm	RLS3 RLS3 RAM			85
RT-KGR0034 Hand stapler – Compact 3 in 1, 6-14 mm	RLS3 8-112m		13	86
RT-KGR0053			4	87



Contents			
RT-KGR0055 Hand stapler – Office, 6-10 mm	RLS3 PLS3 PLS3	6	88
RT-KGR0153 Hand stapler – Handy, 6-10 mm			89
RT-KGR0162 Hand stapler – 3 in 1 Heavy duty	R153 R150 R130 R130 R136 R136 R136	RLO	90
STAPLES:			91
RT-KSS53 STAPLES RL 53 RT-KSS05306, RT-KSS05308, RT-KSS05310, RT-KSS05312, RT-KSS053 RT-KSS053065000, RT-KSS053085000, RT-KSS053105000, RT-KSS05			94
RT-KSS140 STAPLES RL 140 RT-KSS14006, RT-KSS14008, RT-KSS14010, RT-KSS14012, RT-KSS1 RT-KSS140065040, RT-KSS140085040, RT-KSS140105040, RT-KSS			95
RT-KSS140 STAINLESS STEEL STAPLES RL 140 RT-KSS14010SS – double blister			95
RT-KSS013 STAPLES RL 13 RT-KSS01306, RT-KSS01308, RT-KSS01310 — double blister RT-KSS013062500, RT-KSS013082500, RT-KSS013102500 — box			96
RT-KSS00714 RL36 STAPLES 14 mm RT-KSS00714 – double blister			97
RT-KSS00814 RL8 NAILS 14 mm RT-KSS00814 — double blister			98
RT-KSS00914 RL9 PINS 14 mm RT-KSS00914 – double blister			99
GLUE GUNS:			10
RT-GG-180, RT-GG-180-UK Professional glue guns 180 W	3 (6	A	10
RT-GG-080, RT-GG-080-UK Universal glue guns 80 W	3 (6	1	10
RT-GG-055, RT-GG-055-UK Glue guns 55 W	3 (6	*	10
GLUE STICKS:			10
RT-GS-U UNIVERSAL GLUE STICKS RT-GS-U1, RT-GS-U2, RT-GS-U2B			10
RT-GS-C GLUE STICKS FOR BONDING CARDBOARD RT-GS-C2, RT-GS-C2B			10
RT-GS-P GLUE STICKS FOR BONDING PLASTIC RT-GS-P2, RT-GS-P2B			10
RT-GS-W GLUE STICKS FOR BONDING WOOD RT-GS-W2, RT-GS-W2B			10
RT-GS-S GLUE STICKS FOR SANITARY USE RT-GS-S2, RT-GS-S2B			10
RT-GS-E EXTRA STRONG GLUE STICKS RT-GS-E1, RT-GS-E2, RT-GS-E2B			11
RT-GS-M SET OF UNIVERSAL AND EXTRA STRONG GLUE STICK RT-GS-M2	S		. 11

SC40II

New gas powered steel and concrete nailer from Rawlplug









INNOVATION

Lithium-Ion power platform provides the highest efficiency and performance. Rawlplug's new Li-Ion system provides 8000 fixings from each battery, rapid charging feature allowing for 200 fixings in just 2 minutes of charging and battery preserving functions like switching the tool into stand-by mode after 10 minutes of inactivity.

MAXIMUM PERFORMANCE AND VERSATILITY

New depth adjustment mechanism allows for great control over the fixing process. As a result, you get a successful fixing every time. With the lowest weight among gas powered tools, new ergonomic design, ease of maintenance and battery conserving features, it provides great operating experience and performance.

DURABILITY AND LOW RUNNING COST

Thanks to newly designed dust protection cover, it is much more resistant to damage caused by debris or dust form overhead applications. In fact, the overall damage rate of our new system is reduced by 40% compared to the previous tool, which reduces the running cost. reducing the running cost.

RELIABLE AND EFFICIENT INSTALLATION



Quick and efficient tool for high volume fixings, especially in drywall and electrical applications. With the capacity of performing a fixing under one second, it is a real boost for efficiency on any job.

RAWLPLUG® GAS POWERED TOOLS FOR CONCRETE



New generation of gas powered nailer for steel and concrete from Rawlplug is capable of securing round head pins in steel and concrete using a combustion Energy of a gas mixture. The fixing is performed in under one second each. If we combine this with battery efficiency of 8000 fixings per charge and charging time of just 30 minutes, the result is a tremendous improvement in jobsite productivity.

R-RAWL-SC40 II Gas powered steel and concrete nailer

High performance gas powered steel and concrete nailer







Certificate (E

Product information

Features and benefits

- Perfect weight to recoil ratio provides the tool not only being one of the lightest on the market but also improves comfort of daily use.
- Lithium technology accompanied by energy saving features ensures high capacity of the battery pack.
- Simplified depth adjustment design provide the end user with easy but accurate depth of drive control.
- Completely redesigned dust cover protects the internal components and improves durability of the tool by 40%.
- Compact and ergonomic design allows the operator to achieve great accessibility and freedom of operation.
- Detachable magazine and nose piece ensure easy maintenance and jam clearance.

Applications

- Applicable for fixing steel and aluminium profiles in drywall structures
- Cable conduits and wires installation
- Installation of all types of MEP clips and clamps

Corresponding products

- R-KNC plastic collated concrete pins with fuel cells
- R-KSC plastic collated pins for steel with fuel cells
- R-RAWL-GP5
- R-KIT-WW90/SC40

Base materials

- Concrete C20/25-C50/60
- Concrete Slab
- Unreinforced concrete
- Concrete
- Structural Steel

Set includes

- R-SC40II Steel and concrete nailer
- 2 batteries
- · Charger base
- · AC power supply cable
- Operating and Safety manual

	Index	Fastener length range [mm]	Fastener type	Subs- trate	Dimensions [mm]	Fuel cell type		Magazine capacity [nail]		Shots per charge	Noise level [dB]	Box Weight kg	Outer Weight kg	- EAN
R-	RAWL-SC40 II	15 - 40	Round head pin	Concrete C20/25 - C50/60	395x355x120	GP5	3.4	30	0.5	8000	92	8.54	17.09	5906675438092

R-KNC Plastic collated concrete pins with fuel cells

Smooth shank galvanised pins for concrete applications







Certificate C E



Features and benefits

- Ballistic point increases performance into the base material. This special design is responsible for providing best load bearing values for this type of fixing
- Smooth shank and toughness of 57 60 HRC provides great penetration ability and give best result in hard substrates
- Plastic collation provides protection from deterioration by weather conditions or high humidity
- Compatible with leading manufactures tools present on the marketplace
- Full round head for a secure fixing with highest performance

Applications

- Fixing steel or aluminium profiles into concrete in drywall systems
- Fixing electrical boxes, sanitary ware, cable trunking, etc.
- Cable conduits and wires installation

Corresponding products

 R-RAWL-SC40 Gas powered steel and concrete nailer

Base materials

- Concrete C20/25-C50/60
- Concrete Slab
- Unreinforced concrete
- Non-cracked Concrete

Packaging



Index	Fastener diameter	Length	Head	Shank	Finish	Protec-	Shank hardness	Fasteners per strip		Fuel cells per carton	Box Weight	Outer Weight	EAN		
IIIGEX	[mm]	[mm]	type	type	1 1111311	tion	tion [Hrc]	tion [Hrc]	tion [Hrc]	[pcs]	[pcs]	[pcs]	kg	kg	LAIT
R-KNC-6/22/500	2.7	22	Full Round	Smooth	Electro galvanised	Up to 4 microns	57 - 60	10	500	1	0.75	0.85	5906675438122		
R-KNC-6/25/500	2.7	25	Full Round	Smooth	Electro galvanised	Up to 4 microns	57 - 60	10	500	1	0.83	1.67	5906675438139		
R-KNC-6/27/500	2.7	27	Full Round	Smooth	Electro galvanised	Up to 4 microns	57 - 60	10	500	1	0.86	0.90	5906675438146		
R-KNC-6/32/500	2.7	32	Full Round	Smooth	Electro galvanised	Up to 4 microns	57 - 60	10	500	1	0.97	0.95	5906675438153		
R-KNC-6/38/500	2.7	38	Full Round	Smooth	Electro galvanised	Up to 4 microns	57 - 60	10	500	1	1.12	1.00	5906675438160		

R-KSC Plastic collated pins for steel with fuel cells

Smooth shank galvanised pins for lightWeight steel applications













Product information

Features and benefits

- Ballistic point increases performance into the base material. This special design is responsible for providing best load bearing values for this type of fixing
- Smooth shank and toughness of 57 60 HRC provides great penetration ability and give best result in hard substrates
- Plastic collation provides protection from deterioration by weather conditions or high humidity
- Compatible with leading manufactures tools present on the marketplace
- Full round head for a secure fixing with the highest perfomance acheived

Applications

- Fixing steel profiles into concrete in drywall systems
- Fixing electrical boxes, sanitary ware, cable trunking, etc.
- Cable conduits and wires installation

Corresponding products

• R-RAWL-SC40 Gas powered steel and concrete nailer

Base materials

- Structural Steel
- Concrete C20/25-C50/60
- Concrete Slab
- Unreinforced concrete
- Non-cracked Concrete

Packaging



Index	Fastener diameter	Length	Head	Shank	Finish	Protec- tion	Shank hardness	Fasteners per strip	Carton quantity	Fuel cells per carton	Box Weight	Outer Weight	EAN
	[mm]	[mm]	type	type		LIOII	[Hrc]	[pcs]	[pcs]	[pcs]	kg	kg	
R-KSC-6/17/500	2.7	17	Full Round	Smooth	Electro galvani- sed	Up to 4 microns	57 - 60	10	500	1	0.63	0.60	5906675438177
R-KSC-6/19/500	2.7	19	Full Round	Smooth	Electro galvani- sed	Up to 4 microns	57 - 60	10	500	1	0.68	0.70	5906675438184

R-RAWL-GP5 Fuel cell

Fuel cell for use with R-RAWL-SC40II gas powered nailer





Product information

Features and benefits

- Clean Propane & Butane mixiture reduces carbon residue
- High quality propellant for increased performance
- Contains a fully synthetic oil for lubricating the tool
- Functions from -5°C to 35°C to elongate the work site capability of the system
- Manufactured in accordance with European Regulations

Applications

• Powering gas powered steel and concrete nailers

Corresponding products

 R-RAWL-SC40II Steel and concrete nailer

Index	Eugl bype	Lubrication	Size	Weight	Operating temperatures	Efficiency	Box Weight	Outer Weight	EAN
index	Fuel type Lubrica	Lubricacion	[mt]	weight	[°C]	[shots]	kg	kg	EAN
R-RAWL-GP5	Propane & Butane	Yes	55	30	-5 - 35	min. 500 shots	0,065	0,71	5906675438078



R-PCC Pipe and cable clip

Universal installation clips appcliable to majority of M&E applications











Product information

Features and benefits

- The clip allows to use it in multiple applications thanks to adjustable diameter
- Equiped with countersink cavity allowing to place it firmly onto the nose piece of the tool and perform one hand over head installation
- The clip made out of recyclable PA6 provides sustainability
- Possibility to use the clip for hot water pipes thanks to special groove in the clip base and an installation railing
- Suitable for installing metric, copper, steel, multilayer, PE, PP, PB and stainles pipes
- Product compatible with majority of the gas powered tools available on the market, which allows to match accessories with your equipment

Applications

- Fixing pipes and cables in HVAC systems
- Installing cables in pipes and corrugated conduits
- Installation of metal and plastic pipes in all pipework installations

Corresponding products

- R-RAWL-SC40II Steel and concrete nailer
- R-KNC plastic collated concrete pins with fuel cells
- R-KSC plastic collated pins for steel with fuel cells

Base materials

- Concrete C20/25-C50/60
- Concrete Slab
- LightWeight Concrete Block
- Non-cracked Concrete
- Unreinforced concrete
- Structural Steel

Index	Bag quantity	Description	Diameter range	Dimensions	Operating temperatures	Box Weight	Outer Weight	EAN
ilidex	bay qualitity	Description	[mm]	[mm]	[°C]	kg	kg	EAN
R-PCC-18	100 pcs	Adjustable pipe and cable clip	14 - 18	20x24x35,6	-10 - + 90	0.69	24.17	5906675097473
R-PCC-25	50 pcs	Adjustable pipe and cable clip	20 - 25	20X29X45,5	-10 - + 90	0.49	7.33	5906675097480
R-PCC-32	50 pcs	Adjustable pipe and cable clip	26 - 32	20x36x53,6	-10 - + 90	0.60	21.11	5906675097497
R-PCC-42	25 pcs	Adjustable pipe and cable clip	35 - 42	24x45x66,4	-10 - + 90	0.46	6.85	5906675097503

R-UTC Pipe and cable plastic clip

Plastic brackets for pipes and conduits for applications in electrical installations, water and sewage systems, and HVAC





Certificate

RoHS

Product information

Features and benefits

- Easy to install with the possibility of setting on the tool nose piece
- Possibility of joining clips in larger sections with special locks on the sides of the handle
- Can be used in heating systems using installation rail
- Special socket design ensures compatibility with most nail guns available on the market
- The range of the offer provides the ability to handle most plumbing applications
- The hole in the base allows mounting the bracket using the traditional method

Applications

- Installing cables in pipes and corrugated conduits
- Fixing pipes and cables in HVAC systems
- Pipe installation in plumbing

Corresponding products

- R-KNC plastic collated concrete pins with fuel cells
- R-KSC plastic collated pins for steel with fuel cells
- R-RAWL-SC40II Steel and concrete nailer

Base materials

- Concrete C20/25-C50/60
- Concrete Slab
- · Unreinforced concrete
- · Structural Steel

to to a	B	Diameter	Dimensions	Box Weight	Outer Weight	EAN	
Index	Bag quantity	[mm]	[mm]	kg	kg	EAN	
R-UTC-16	100 pcs	16	10x23x23,5	0.40	5.93	5906675097510	
R-UTC-20	100 pcs	20	10x25x29,5	0.00	0.06	5906675097534	
R-UTC-25	100 pcs	25	10x30x34	0.55	8.31	5906675097541	
R-UTC-32	50 pcs	32	10x38x42	0.41	6.12	5906675097558	
R-UTC-40	50 pcs	40	10x46x50	0.49	7.39	5906675097565	

R-TPC Plastic clip for twin and earth cable

Plastic clip for installing 17mm twin and earth cable







Certificate

RoHS

Product information

Features and benefits

- Side snap-in installation provides the possibility of rerouting if necessary
- Equiped with countersink cavity allowing to place it firmly onto the nose piece of the tool and perform one hand over head installation
- Side snap-in installation provides the possibility of rerouting if necessary
- Manufactured in accordance to RoHS from halogene free PA6
- Applicable for electrical installations on technical floors, walls and ceilings
- Product compatible with majority of the gas powered tools available on the market, which allows to match accessories with your equipment
- High durability provided by the use of impact-resistant polyamide

Applications

• Installing twin and earth cable with plastic clip for gas nailer

Corresponding products

- R-KNC plastic collated concrete pins with fuel cells
- R-KSC plastic collated pins for steel with fuel cells
- R-RAWL-SC40II Steel and concrete nailer

Base materials

- Concrete C20/25-C50/60
- Hollow LightWeight Concrete Block
- LightWeight Concrete Block
- Cracked Concrete
- Solid Concrete Block

Index	Carton quantity	Width	Box Weight	Outer Weight	EAN	
ilidex	[pcs]	Width	kg	kg	LAN	
R-TPC-17	100	17.5	0.03	0.25	5906675223681	

R-TPLC Plastic clip for twin and earth cable

Plastic clip for installing twin and earth cable





RoHS



Features and benefits

- Equiped with countersink cavity allowing to place it firmly onto the nose piece of the tool and perform one hand over head installation
- Manufactured in accordance to RoHS from halogene free PA6
- Applicable for electrical installations on technical floors, walls and ceilings
- Product compatible with majority of the gas powered tools available on the market, which allows to match accessories with your equipment
- Quick assembly with the use of gas nailer is an cost effective alternative to all other installation methods

Applications

 Installation of twin and earth flat cables of width up to 25.5mm using a SC40 gas nailer

Corresponding products

- R-KNC plastic collated concrete pins with fuel cells
- R-KSC plastic collated pins for steel with fuel cells
- R-RAWL-SC40II Steel and concrete nailer

Base materials

- Concrete C20/25-C50/60
- Concrete Slab
- Cracked Concrete
- · Unreinforced concrete
- Hollow LightWeight Concrete Block

Index	Carton quantity	Width	Box Weight	Outer Weight	FAN
Index	[pcs]	[mm]	kg	kg	EAN
R-TPLC-25	100	25.5	0.06	0.55	5906675223698

R-AW Thrust metal washer

Steel thrust washer for installation applications.



Certificate

RoHS

Product information

Features and benefits

- Plastic instert allowes to place it in the nose piece and operate with one hand overhead
- A minimum of 5 micron zinc plating for optimal corrosion protection
- Washers available in two diameters 15 and 25mm for best performance in any application
- Product compatible with most of the gas tools available on the market which allows matching accesories with your equipment
- · Plastic insert made out of recyclable HDPE
- A wide range of applications reached, thanks to large pressure surface. Especially important when securing elements made out of plastic

Applications

- Fixing steel or aluminium profiles into concrete in drywall systems
- Fixing electrical boxes, sanitary ware, cable trunking, etc.
- Fastening plastic elements liable to damage while installing

Corresponding products

- R-KNC plastic collated concrete pins with fuel cells
- R-KSC plastic collated pins for steel with fuel cells
- R-RAWL-SC40II Steel and concrete nailer

Base materials

- Concrete C20/25-C50/60
- Concrete Slab
- Unreinforced concrete
- Structural Steel

Index	Material	Diameter	Thickness	Box Weight Finish kg	Outer Weight	EAN	
		[mm]	[mm]		kg	kg	
R-AW-15	Steel	15	1	Electro galvanised	0.32	5.11	5906675222646
R-AW-25	Steel	25	1	Electro galvanised	0.45	7.20	5906675222752

R-FPD Double plastic clip

Double plastic clip for MEP applications





Product information

Features and benefits

- Designed to be used for fixing installation pipes ex. underfloor heating
- Applicable for electrical installations on technical floors, walls and ceilings
- Manufactured in accordance to RoHS from halogene free PA6
- Product compatible with majority of the gas powered tools available on the market, which allows to match accessories with your equipment
- Thanks to its special design, it provides secure fixing of installed parts
- Special slot for tools nose peice provides good positioning and precision of fixing

Applications

- Pipework installation
- Underfloor heating installation

Corresponding products

- R-KNC plastic collated concrete pins with fuel cells
- R-KSC plastic collated pins for steel with fuel cells
- R-RAWL-SC40II Steel and concrete nailer

Base materials

- Concrete C20/25-C50/60
- Concrete Slab
- · Unreinforced concrete
- Structural Steel

Index	Internal diameter	Carton quantity	Box Weight	Outer Weight	543
	[mm]	[pcs]	kg	kg	EAN
R-FPD-16	16	100	0.52	5.20	5906675394190
R-FPD-20	20	50	0.18	2.80	5906675394206
R-FPD-25	25	50	0.25	2.45	5906675394213

R-FP Single plastic clip

Single plastic clip for MEP applications





Product information

Features and benefits

- Designed to be used for fixing installation pipes ex. underfloor heating
- Applicable for electrical installations on technical floors, walls and ceilings
- Manufactured in accordance to RoHS from halogene free PA6
- Product compatible with most of the tools available on the market
- Thanks to its special design, it provides secure fixing of installed parts
- Special slot for tools nose peice provides good positioning and precision of fixing
- Product compatible with majority of the gas powered tools available on the market, which allows to match accessories with your equipment

Applications

- · Pipework installation
- Underfloor heating installation

Corresponding products

- R-KNC plastic collated concrete pins with fuel cells
- R-KSC plastic collated pins for steel with fuel cells
- R-RAWL-SC40II Steel and concrete nailer

Base materials

- Concrete C20/25-C50/60
- Concrete Slab
- Unreinforced concrete
- Structural Steel

Index	Internal diameter	Carton quantity	Box Weight	Outer Weight	
	[mm]	[pcs]	kg	kg	EAN
R-FP-16	16	100	0.23	3.60	5906675394121
R-FP-18	18	100	0.47	7.52	5906675394138
R-FP-20	20	100	0.50	8.00	5906675394145
R-FP-22	22	100	0.55	8.80	5906675394169
R-FP-25	25	100	0.58	5.80	5906675394176
R-FP-28	28	100	0.08	0.75	5906675223599
R-FP-32	32	50	0.17	2.64	5906675394183

R-PFT Single metal clip for low voltage fire protection systems

Single metal clip for low voltage electric installations





Certificate

RoHS

Product information

Features and benefits

- With its special design and issued certificates it is dedicated to fasten lowvoltage installations, e.g. CCTV, alarm or fire protection systems
- Proven to provide full functionality of the fire resistant cable up to maximum required time(120 min)
- A minimum of 5 microns of zinc coating for better corrosion protection
- Equiped with plastic insert allowing to place it firmly in the nose piece of the tool and perform one hand over head installation
- Product compatible with most of the gas tools available on the market which allows matching accesories with your equipment

Applications

 Installation of low voltage cables in alrm, CCTV, IT and fire protection systems

Corresponding products

- R-RAWL-SC40II Steel and concrete nailer
- R-KNC plastic collated concrete pins with fuel cells
- R-KSC plastic collated pins for steel with fuel cells

Base materials

- Concrete C20/25-C50/60
- Concrete Slab
- Unreinforced concrete
- · Structural Steel

Index	Carton quantity	Internal diameter	Class fire reaction	Box Weight	Outer Weight	FAN
index	[pcs]	[mm]	[min]	kg	kg	EAN
R-PFT-6	50	6	90	0.16	0.80	5906675394336
R-PFT-8	50	8	90	0.10	0.48	5906675394343
R-PFT-10	50	10	90	0.20	3.20	5906675394367
R-PFT-12	100	12	90	0.90	14.40	5906675394374

R-DFT Double metal clip for low voltage fire protection systems

Double metal clip for low voltage electric installations





Certificate

RoHS

Product information

Features and benefits

- With its special design and issued certificates it is dedicated to fasten lowvoltage installations, e.g. CCTV, alarm or fire protection systems
- Proven to provide full functionality of the fire resistant cable up to maximum required time(120 min)
- Equiped with plastic insert allowing to place it firmly in the nose piece of the tool and perform one hand over head installation
- 5 microns of zinc coating provides good protection against corrosion

Applications

 Installation of low voltage cables in alarm, CCTV, IT and fire protection systems

Corresponding products

- R-KNC plastic collated concrete pins with fuel cells
- R-KSC plastic collated pins for steel with fuel cells
- R-RAWL-SC40II Steel and concrete nailer

Base materials

- Concrete C20/25-C50/60
- Concrete Slab
- · Unreinforced concrete
- Structural Steel

Index	Carton quantity	Internal diameter	Class fire reaction	Box Weight	Outer Weight	EAN
index	[pcs]	[mm]	[min]	kg	kg	EAN
R-DFT-6	100	6	90	0.90	14.40	5906675394091
R-DFT-8	100	8	90	0.92	14.72	5906675394107
R-DFT-10	100	10	90	0.50	7.50	5906675394114

R-FT Single metal clip for pipe installation

Single metal clip for MEP applications





Product information

Features and benefits

- A clip designed to be used with SC40 gas nailer equiped with magnetic nose tip allowing to operate with one hand overhead
- Wide range of available diameters allows to select ideal clip for each application.
 Suitable for installation of metric, imperial(inch), copper, multilayer, PE, PP, PB and stainless pipes
- A minimum of 5 microns of zinc coating for better corrosion protection
- Single metal clip for pipe installation ensures cost savings and time effectiveness
- Product compatible with most of the gas tools available on the market which allows matching accesories with your equipment

Applications

- Pipe installation in plumbing
- Fixing pipes and cables in HVAC systems
- Installing cables in pipes and corrugated conduits

Corresponding products

- R-KNC plastic collated concrete pins with fuel cells
- R-KSC plastic collated pins for steel with fuel cells
- R-RAWL-SC40II Steel and concrete nailer

Base materials

- Concrete C20/25-C50/60
- Concrete Slab
- Unreinforced concrete
- · Structural Steel

Index	Carton quantity	Internal diameter	Box Weight	Outer Weight	FAN
index	[pcs]	[mm]	kg	kg	EAN
R-FT-10	100	10	0.28	4.48	5906675394220
R-FT-16	100	16	0.50	7.50	5906675394244
R-FT-18	100	18	0.65	9.75	5906675394275
R-FT-20	100	20	0.92	13.80	5906675394282
R-FT-22	100	22	1.10	11.00	5906675394299
R-FT-25	100	25	1.14	11.40	5906675394305
R-FT-28	100	28	1.37	13.70	5906675394312
R-FT-32	100	32	1.55	15.50	5906675394329

R-WDC Double cable bow

Double plastic cable bow for wiring and electrical installations



Certificate

RoHS

Product information

Features and benefits

- Thanks to special design it is possible to expand or reduce the number of cables without dismantleing the clip
- Precise fixing thanks to pre-moulded markers on the base of the clasp
- Product compatible with most of the gas tools available on the market which allows matching accesories with your equipment
- Applicable for electrical installations on technical floors, walls and ceilings
- Eqiped with a special socket for tools nose piece for one-hand operation overhead

Applications

 Installation of cables in industrial and commercial applications, where frequent rerouting is expected

Corresponding products

- R-KNC plastic collated concrete pins with fuel cells
- R-KSC plastic collated pins for steel with fuel cells
- R-RAWL-SC40II Steel and concrete nailer

Base materials

- Concrete C20/25-C50/60
- Concrete Slab
- Unreinforced concrete
- Structural Steel

	Index	Carton quantity	Width	Box Weight	Outer Weight	EAN	
		[pcs]	[mm]	kg	kg	EAN	
	R-WDC	100	76.5	0.50	5.00	5906675394381	



R-WSC Single cable bow

Single plastic clip for wiring and electrical installations



Certificate

RoHS

Product information

Features and benefits

- Thanks to special design it is possible to expand or reduce the number of cables without dismantleing the clip
- Manufactured in accordance to RoHS from halogene free PA6
- Product compatible with most of the gas tools available on the market which allows matching accesories with your equipment
- Applicable for electrical installations on technical floors, walls and ceilings

Applications

 Installation of cables in industrial and commercial applications, where frequent rerouting is expected

Corresponding products

- R-KNC plastic collated concrete pins with fuel cells
- R-KSC plastic collated pins for steel with fuel cells
- R-RAWL-SC40II Steel and concrete nailer

Base materials

- Concrete C20/25-C50/60
- Concrete Slab
- · Unreinforced concrete
- Solid Concrete Block

Index	Carton quantity	Width	Box Weight	Outer Weight	EAN
Index	[pcs]	Width	kg	kg	EAN
R-WSC	100	76.5	0.13	1.25	5906675223650

R-RAWL-RB3908 Rebar tier wire

Galvanised tie wire for R-RAWL-RB39 rebar tier for joining rebar reinforcing structures







Certificate C €

Product information

Features and benefits

- Electro galvanised wire provides high corrosion protection of each individual tie
- Depending on the tool settings the coil lasts for 120/150 knots which reduces reload time
- Detailed design and manufacturing process ensures stability of parameters and performance
- Easy to dispose plastic part of the coil with no additional parts is 100% recyclable

Applications

- Dedicated to use with R-RAWL-RB39 rebar tier
- Commercial and private building industry, infrastructure projects
- Prefabricated reinforced concrete elements

Corresponding products

• R-RAWL-RB39 Rebar tier

Index	Diameter	Wire amount on the coil	Carton quantity	Conting type	Box Weight	Outer Weight	EAN
ilidex	[mm]	[m]	[pcs]	Coating type	kg	kg	EAN
R-RAWL-RB3908	0.8	95	50	Galvanised	20.32	20.32	5906675057767

R-KSC Plastic collated pins for steel with fuel cells

Smooth shank galvanised pins for lightWeight steel applications







Certificate

((

Product information

Features and benefits

- Ballistic point increases performance into the base material. This special design is responsible for providing best load bearing values for this type of fixing
- Smooth shank and toughness of 57 60 HRC provides great penetration ability and give best result in hard substrates
- Plastic collation provides protection from deterioration by weather conditions or high humidity
- Compatible with leading manufactures tools present on the marketplace
- Full round head for a secure fixing with the highest perfomance acheived

Applications

- Fixing steel profiles into concrete in drywall systems
- Fixing electrical boxes, sanitary ware, cable trunking, etc.
- Cable conduits and wires installation

Base materials

• Structural Steel

Corresponding products

R-RAWL-SC40II Steel and concrete nailer


Packaging



SP-AM-11 Plastic collated and single shot pins for steel and concrete




Index	Fastener diameter	Length	Head	Shank	Finish	Protection	Collation	Fasteners per strip	Carton quantity	Fuel cells per carton	Box Weight	Outer Weight	EAN
IIIGEX	[mm]	[mm]	type	type	1 1111311	riotection	Cottacion	[pcs]	[pcs]	[pcs]	kg	kg	LAIT
SP-KSC-8/16T	3.7	16	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	10	500	1	2.17	10.86	5906675139470
SP-KSC-8/19T	3.7	19	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	10	500	1	1.27	15.21	5906675139487
SP-KSC-8/22T	3.7	22	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	10	500	1	1.33	15.93	5906675139494
SP-KSC-8/27T	3.7	27	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	10	500	1	1.52	18.28	5906675139500
SP-KSC-8/32T	3.7	32	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	10	500	1	1.74	20.84	5906675139517
SP-KSC-8/37T	3.7	37	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	10	500	1	1.90	22.80	5906675139524
SP-KSC-8/42T	3.7	42	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	10	500	1	2.15	25.83	5906675139531
SP-KSC-8/47T	3.7	47	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	10	500	1	2.39	11.95	5906675167022
SP-KSC-8/52T	3.7	52	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	10	400	1	2.62	13.08	5906675139555
SP-KSC-8/57T	3.7	57	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	10	300	1	2.85	14.27	5906675139562
SP-KSC-8/62T	3.7	62	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	10	300	1	1.86	22.32	5906675167084
SP-KSC-8/67T	3.7	67	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	10	300	1	1.75	21.00	5906675139586
SP-KSC-8/72T	3.7	72	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	10	300	1	2.12	25.41	5906675139593



Index	Fastener diameter	Length	Head	Shank	Finish	Protection	Collation	Carton quantity	Fuel cells per carton	Box Weight	Outer Weight	EAN
IIIdex	[mm]	[mm]	type	type	Filliali	FIOCECCIOII	Cottacion	[pcs]	[pcs]	kg	kg	EAN
SP-KSC-8/27	3.7	27	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	500	1	1.45	26.01	5906675139630
SP-KSC-8/42	3.7	42	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	300	1	1.32	23.76	5906675167206
SP-KSC-8/47	3.7	47	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	300	1	2.20	11.00	5906675167220
SP-KSC-8/52	3.7	52	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	100	1	1.52	27.28	5906675139685
SP-KSC-8/57	3.7	57	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	300	1	1.60	28.80	5906675139692
SP-KSC-8/62	3.7	62	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	100	1	1.78	21.36	5906675139708
SP-KSC-8/72	3.7	72	Round	Smooth	Electro galvanised	Up to 4 microns	Plastic strip	300	1	2.00	36.08	5906675139715

SP-AM-11 Cartridge shots

Powder cartridges for PAT systems

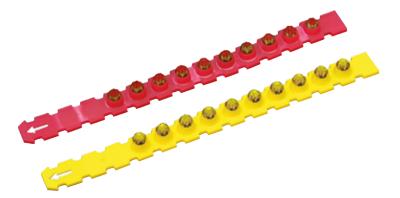





Certificate

 ϵ

Product information

Features and benefits

- Product free of led and other heavy metals which ensures safety in terms of health hazards.
- Clean combustion technology guarantees lack of residue in the tool.
- Easy disposal thanks to simple composition.
- Designed to be compatible with all of the strip-type powder tools available on the marketplace.
- Two strength level allow for precise adjustment of drive energy.

Applications

- Propulsion powder actuated tools
- Installing railing, formwork, installations and temporary fixings.

Base materials

- Concrete C20/25-C50/60
- Concrete Slab
- Unreinforced concrete
- Non-cracked Concrete

Index	Strength	Collation	Shots per strip	Carton quan- tity	Box Weight	Outer Weight	EAN
				pcs	kg	kg	
SP-AM-11/68Y	Weak	Plastic strip	10	100	0.14	14.45	0020892101395
SP-AM-11/68R	Medium	Plastic strip	10	100	0.15	14.97	0020892101456

RAWLPLUG® GAS POWERED TOOLS FOR TIMBER

If you have a requirement for fixing timber to timber, rawlplug has a range of professional tools for the job.



R-RAWL-WW90CH Gas powered framing nailer

High performance gas powered framing nailer for timber framing and roofing applications







Certificate C E

Product information

Features and benefits

- Nail range from 50mm to 90mm for wide range of applications
- Removable no mark nose for protecting the timber surface. Especially important when securing timber cladding or facades
- Sequential firing mode for operators safety and fixing precision
- Rear loading magazine with a capacity of 60 nails. Quick and simple to load thanks to one hand operation feeder spring. A safety clip at the rear prevents the nails from falling out and ensures safe reloading
- Tool free depth adjustment. The operator can easily adjust the depth that the nail is driven into timber to produce a precise fixing

Applications

- Timber frame stud work in timber framing industry
- Installation of battens and sheating in roof construction
- Installation of soffits and other roof finishing elements

Corresponding products

- R-DPG paper collated nails with fuel cells
- R-DRG paper collated nails with fuel cells
- R-DPK paper collated nails with fuel cells
- R-DPHDG paper collated nails with fuel cells
- R-KIT-WW90/SC40

Base materials

- Timber
- Chipboard
- · Plywood
- Wood

Set includes

- R-RAWL-WW90CH Gas powered nailer
- 2 batteries
- · Charger base
- AC power supply cable
- Operating and Safety manual

Packaging



Index	Fastener length range	Fastener	Substrate	Dimensions	Fuel cell	Weight	Magazine capacity		Shots per	Noise level	Box Weight	Outer Weight	EAN
	[mm]	type		[mm]	type	[kg]	[nail]	[h]	charge	[dB]	kg	kg	
R-RAWL-WW90CH	50 - 90	Clipped head nail	Timber	367x372x108	GP1	3.4	60	2	4000	94	8.61	17.23	5906675222240

R-RAWL-GMC38 Gas powered joist hanger nailer

Efficient and durable gas powered metal connectors nailer







Certificate C €

Product information

Features and benefits

- Nail range from 35 to 60mm provides broad range of applications
- Sequential firing mode for operators safety and fixing precision
- Nose with probe mechanism tip locates in the pre-drilled hole for a precise and quick fixing. Easy to operate even in limited access areas
- Capable of accepting both paper and plastic collated nails for freedom of choice
- Rear loading magazine with a capacity of 60 nails. Quick and simple to load thanks to one hand operation feeder spring. A safety clip at the rear prevents the nails from falling out and ensures safe reloading

Applications

- Installation of all types of metal connectors
- Installation of truss supports and angled joints
- Installation of perforated steel tanes

Corresponding products

- R-RAWL-GP1
- R-HDGT paper collated nails
- R-KIT-WW90/SC40

Base materials

- Timber
- Oriented Strand Board
- Plywood
- Wood

Set includes

- R-RAWL-GMC38 Gas powered joist hanger nailer
- 2 batteries
- Charger base
- AC power supply cable
- Operating and Safety manual

Packaging



Index	Fastener type	Fuel cell type	Magazine capacity [nail]		Shots per charge	Noise level [dB]	Weight [kg]	Dimensions [mm]	Fastener length range [mm]	Subs- trate	Box Weight kg	Outer Weight kg	EAN
R-RAWL-GMC38	34° paper lamina- ted	GP1	30	2	4000	94	3.8	355x108x393	35 - 60	Timber	11.00	22.00	5010445007552

R-RAWL-A2064 Gas powered second fix nailer

Gas powered angled brad nailer for all second fix applications







Certificate C E

Product information

Features and benefits

- 16 gauge Brad range from 32mm to 64mm for broad range of applications
- Tool free depth adjustment. The operator can easily adjust the depth that the nail is driven into timber to produce a precise fixing
- Quick release mechanism for clearing obstructions and jams without the use of any tools. Allows also to perform simple maintenance
- Removable no mark nose for protecting the timber surface. Especially important in all second fix applications in which undamaged elements will be visible. A spare nose tip cover is stored on the back of the magazine
- LED display for monitoring battery status and preventing battery depletion

Applications

- Installation of wooden facades
- Installation of soffits and other roof finishing elements
- Installation of skirting, architraves and other internal trim
- Manufacturing of furniture, wooden packaging and timber trim

Corresponding products

- Angled brad nails
- R-RAWL-GP4-2BL
- R-KIT-WW90/SC40

Base materials

- Timber
- Plywood
- Chipboard
- Wood

Set includes

- R-RAWL-A2064 gas powered brad nailer
- 2 batteries
- · Charger base
- AC power supply cable
- Operating and Safety manual

Packaging



Index	Fastener length range	Fastener		Dimensions	Fuel cell	Weight	Magazine capacity		Shots per	Noise level	Box Weight	Outer Weight	EAN
	[mm]	type	trate	[mm]	type	[kg]	[nail]	[h]	charge	[dB]	kg	kg	
R-RAWL-A2064	32 - 64	16 gauge angled brad	Timber	320x280x86	GP4	2.15	100	2	4500	92	5.06	10.12	5906675280011

R-RAWL-B1664 Gas powered second fix nailer

Gas powered Straight brad nailer for all common second fix applications







Certificate C E

Product information

Features and benefits

- 16 gauge Brad range from 19mm to 64mm
- Tool free depth adjustment. The operator can easily adjust the depth that the nail is driven into timber to produce a precise fixing
- Quick release mechanism for clearing obstructions and jams without the use of any tools. Allows also to perform simple maintenance
- Removable no mark nose for protecting the timber surface. Especially important in all second fix applications in which undamaged elements will be visible. A spare nose tip cover is stored on the back of the magazine
- LED display for monitoring battery status and preventing battery depletion

Applications

- Installation of wooden facades
- Installation of soffits and other roof finishing elements
- Installation of skirting boards and architraves
- Manufacturing of furniture, wooden packaging and timber trim

Corresponding products

- · Straight brad nails
- R-RAWL-GP4-2BL
- R-KIT-WW90/SC40

Base materials

- Timber
- Plywood
- Chipboard
- Wood

Set includes

- R-RAWL-B1664 Straight brad nailer
- 2 batteries
- · Charger base
- AC power supply cable
- Operating and Safety manual

Packaging



Index	Fastener length range [mm]	Fastener type	Subs- trate	Dimensions [mm]	Fuel cell type	Weight [kg]	Magazine capacity [nail]			Noise level [dB]	Box Weight kg	Outer Weight kg	EAN
R-RAWL-B1664	19 - 64	16 gauge straight brad	Timber	315x274x86	GP4	2.15	100	2	4500	92	5.06	10.12	5906675267654



Clipped head, paper collated nails with fuel cells

Paper collated nails in various finishes and coatings offer number of options in all timber related applications







Certificate C E

Product information

Features and benefits

- 34° angle collation with a clipped head ensures the nail is compatible with all leading manufactures tools
- Special coating at the base of the shank improves the drive of the nail and ensures a secure fixing
- Diamond point prevents the timber from splitting
- Waxed paper collation avoids deterioration in wet conditions
- Paper tape collation ensures that no collating material is left on the work site
- Minimum of 10 microns zinc coating provides great corrosion protection
- Depending on the quantity of nails box contains 1, 2 or 3 fuel cells

Applications

- Timber frame stud work in timber framing industry
- Installation of battens and sheating in roof construction
- Installation of soffits and other roof finishing elements
- Installation of wooden facades

Corresponding products

• R-RAWL-WW90CH Gas powered framing nailer

Base materials

- Timber
- Plywood
- Chipboard
- Wood

Packaging



Index	Fastener diameter		Head	Shank	Finish	Protection	Collation	Fasteners per strip	Carton quantity	Fuel cells per carton	Box Weight	Outer Weight	EAN
illuex	[mm]	[mm]	type	type	Fillisii	Protection	Collation	[pcs]	[pcs]	[pcs]	kg	kg	EAN
R-DPG-2851	2.8	51	Clipped head	Smooth	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	3	28.71	28.71	5906675072753
R-DPG-3163	3.1	63	Clipped head	Smooth	Silver Galvanised	Minimum 10 microns	34º paper laminated	44	3300	3	13.38	13.38	5906675070971
R-DPG-2875	2.8	75	Clipped head	Smooth	Silver Galvanised	Minimum 10 microns	34º paper laminated	44	3300	3	28.71	28.71	5906675070995
R-DPG-3175	3.1	75	Clipped head	Smooth	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	2200	2	10.61	10.61	5906675070940
R-DPG-3190	3.1	90	Clipped head	Smooth	Silver Galvanised	Minimum 10 microns	34º paper laminated	44	2200	2	12.35	12.35	5906675225739



Product commercial data (cont.)

	Fastener diameter	Length	Head	Shank				Fasteners per strip	Carton quantity	Fuel cells per carton	Box Weight	Outer Weight	
Index	[mm]	[mm]	type	type	Finish	Protection	Collation	[pcs]	[pcs]	[pcs]	kg	kg	EAN
R-DPGH-3190	3.1	90	Clipped head	Smooth	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	1100	1	6.18	6.18	5906675023434
R-DPHDG-3190	3.1	90	Clipped head	Smooth	Hot dipped galvanised	Minimum 50 microns	34° paper laminated	44	2200	2	13.14	13.14	5906675047461
R-DPK-2851	2.8	51	Clipped head	Smooth	Bright	34° paper collated	Minimum 10m	44	3300	3	9.56	9.56	5906675225616
R-DPK-2863	2.8	63	Clipped head	Smooth	Bright	34° paper collated	Minimum 10m	44	3300	3	11.47	11.47	5906675047546
R-DPK-3163	3.1	63	Clipped head	Smooth	Bright	34° paper collated	Minimum 10m	44	3300	3	13.25	13.25	5906675070957
R-DPK-2870	2.8	70	Clipped head	Smooth	Bright	34° paper collated	Minimum 10m	44	3300	3	12.48	12.48	5906675266749
R-DPK-2875	2.8	75	Clipped head	Smooth	Bright	34° paper collated	Minimum 10m	44	3300	3	13.20	13.20	5906675225630
R-DPK-3175	3.1	75	Clipped head	Smooth	Bright	34° paper collated	Minimum 10m	44	2200	2	10.34	10.34	4008940127401
R-DPK-3190	3.1	90	Clipped head	Smooth	Bright	34° paper collated	Minimum 10m	44	2200	2	12.38	12.38	5906675225654
R-DRG-2851	2.8	51	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	3	9.13	9.13	5906675225746
R-DRG-2863	2.8	63	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	3	11.14	11.14	5906675036212
R-DRG-3163	3.1	63	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	3	8.99	8.99	5906675023397
R-DRG-2870	2.8	70	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	3	12.12	12.12	5906675282657
R-DRG-2875	2.8	75	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	3	12.88	12.88	5906675282664
R-DRG-3175	3.1	75	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	2200	2	10.42	10.42	5906675036205
R-DRG-3190	3.1	90	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	2200	2	12.71	12.71	5010445005367
R-DRG-2851	2.8	51	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	3	9.13	9.13	5906675225746
R-DRG-2863	2.8	63	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	3	11.14	11.14	5906675036212
R-DRG-3163	3.1	63	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	3	8.99	8.99	5906675023397
R-DRG-2870	2.8	70	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	3	12.12	12.12	5906675282657
R-DRG-2875	2.8	75	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	3	12.88	12.88	5906675282664
R-DRG-3175	3.1	75	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	2200	2	10.42	10.42	5906675036205
R-DRG-3190	3.1	90	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	2200	2	12.71	12.71	5010445005367
R-DRGH-2851	2.8	51	Clipped head	Ring	Silver Galvanised	Minimum 10 microns		44	1100	1	3.17	3.17	5906675023403
R-DRGH-2863	2.8	63	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	1100	1	3.78	3.78	5906675023410
R-DRGH-3163	3.1	63	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	1100	1	4.52	4.52	5906675289328
R-DRGH-3175	3.1	75	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	1100	1	5.12	5.12	5906675023427
R-DRGH-3190	3.1	90	Clipped head	Ring	Silver Galvanised	Minimum 10 microns		44	1100	1	6.23	6.23	5906675286181
R-DRHDG-2851	2.8	51	Clipped head	Ring		Minimum 50 microns	34° paper laminated	44	3300	3	10.14	10.14	5906675047478
R-DRHDG-2863	2.8	63	Clipped head	Ring		Minimum 50 microns		44	3300	3	11.33	11.33	5906675047485
R-DRHDG-3175	3.1	75	Clipped head	Ring		Minimum 50 microns	34° paper laminated	44	2200	2	10.47	10.47	5906675047492
R-DRHDG-3190	3.1	90	Clipped head	Ring		Minimum 50 microns		44	2200	2	12.45	12.45	5906675047508

Product commercial data (cont.)

Index	Fastener diameter	Length	Head	Shank	Finish	Protection	Collation	Fasteners per strip	Carton quantity	Fuel cells per carton	Box Weight	Outer Weight	EAN
ilidex	[mm]	[mm]	type	type	FIIIISII	Protection	Collation	[pcs]	[pcs]	[pcs]	kg	kg	EAN
R-DRK-2851	2.8	51	Clipped head	Ring	Bright	Minimum 10m	34° paper laminated	44	3300	3	9.26	9.26	5906675047539
R-DRK-2863	2.8	63	Clipped head	Ring	Bright	Minimum 10m	34° paper laminated	44	3300	3	11.15	11.15	5906675049786
R-DRK-3163	3.1	63	Clipped head	Ring	Bright	Minimum 10m	34° paper laminated	44	3300	3	13.34	13.34	5906675070964
R-DRK-2870	2.8	70	Clipped head	Ring	Bright	Minimum 10m	34° paper laminated	44	3300	3	12.09	12.09	5906675266756
R-DRK-2875	2.8	70	Clipped head	Ring	Bright	Minimum 10m	34° paper laminated	44	3300	3	12.98	12.98	5906675070988
R-DRK-3175	3.1	75	Clipped head	Ring	Bright	Minimum 10m	34° paper laminated	44	2200	2	10.33	10.33	5906675038377
R-DRK-3190	3.1	90	Clipped head	Ring	Bright	Minimum 10m	34° paper laminated	44	2200	2	12.27	12.27	5906675225692
R-DRS-2851	2.8	51	Clipped head	Ring	Stainless Steel -A2	Full protec- tion	34° paper laminated	44	3300	3	9.32	9.32	5906675023373
R-DRS-2863	2.8	63	Clipped head	Ring	Stainless Steel -A2	Full protec- tion	34° paper laminated	44	3300	3	11.37	11.37	5906675023380
R-DRS-2851	2.8	51	Clipped head	Ring	Stainless Steel -A2	Full protec- tion	34° paper laminated	44	3300	3	9.32	9.32	5906675023373
R-DRS-2863	2.8	63	Clipped head	Ring	Stainless Steel -A2	Full protec- tion	34° paper laminated	44	3300	3	11.37	11.37	5906675023380
R-DRS-2851	2.8	51	Clipped head	Ring	Stainless Steel -A2	Full protec- tion	34° paper laminated	44	3300	3	9.32	9.32	5906675023373
R-DRS-2863	2.8	63	Clipped head	Ring	Stainless Steel -A2	Full protec- tion	34° paper laminated	44	3300	3	11.37	11.37	5906675023380



R-HDGT-3838 Paper collated joist hanger nails

Twist shank galvanised nails for metal connectors applications







Certificate

(E

Product information

Features and benefits

- 34° angle collation with a clipped head ensures the nail is compatible with all leading manufactures tools
- Waxed paper collation avoids deterioration in wet conditions
- Paper tape collation ensures that no collating material is left on the work site
- Diamond point prevents the timber from splitting
- Twisted shank eases driving the nail into timber and provides better performance
- Full round head provides a secure fixing and high pull through value
- Tapered shank at the nail head provides tight fitting of the metal connector

Applications

Fixing all types of metal wood conectors

Base materials

- Timber
- Plywood
- Wood


Packaging



Indov	Fastener diameter	Length	Hood type	Head diameter	Shank	Finish	Collation	Carton quantity	Pallet quantity	Box Weight	Outer Weight	EAN
Index	[mm]	[mm]	Head type	[mm]	type	Finish	Collation	[pcs]	[pcs]	kg	kg	EAN
R-HDGT-3838	3.8	38	Full Round	8.5	Twist	Hot Dip Galvanised	Paper collated	2200	50	3.44	3.44	5906675266732

Straight brad nails

16 gauge straight brad nails for all second fix applications

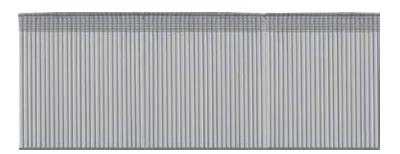





Product information

Features and benefits

- Smooth nail shank for low penetration resistance
- Chisel point to prevent timber from splitting
- T type head provides a concealed fixing
- The glue laminated collation ensures a lack of residue in the tool and on the work surface
- Available in galvanised or stainless steel for higher corrosion protection
- Compatible with all leading manufactures 16ga tools

Applications

- Installation of woodan facades and other external trim applications
- Installation of soffits and other roof finishing elements
- Installation of timber decorative elements on facades and other timber structures

Corresponding products

 R-RAWL-B1664 Gas powered second fix nailer


Base materials

- Timber
- Plywood
- Chipboard
- Wood

Index	Gauge	Length	Finish	Collation	Fasteners per strip	Carton quantity	Fuel cells per carton	Box Weight	Outer Weight	EAN
ilidex	dauge	[mm]	Fillisii	Collacion	[pcs]	[pcs]	[pcs]	kg	kg	LAN
BRADS1619	16 Gauge	19	Galvanised	0° glue laminated	50	2000	2	0.78	0.78	5010445004629
BRADS1625	16 Gauge	25	Galvanised	0° glue laminated	50	2000	2	0.94	0.94	5010445004636
BRADS1625SS	16 Gauge	25	Stainless Steel	0° glue laminated	50	2000	2	0.94	0.94	5010445005305
BRADS1632	16 Gauge	32	Galvanised	0° glue laminated	50	2000	2	1.14	1.14	5010044504643
BRADS1638	16 Gauge	38	Galvanised	0° glue laminated	50	2000	2	1.30	1.30	5010445003585
BRADS1638SS	16 Gauge	38	Stainless Steel	0° glue laminated	50	2000	2	1.32	1.32	5010445005312
BRADS1645	16 Gauge	45	Galvanised	0° glue laminated	50	2000	2	1.50	1.50	5010445004650
BRADS1650	16 Gauge	50	Galvanised	0° glue laminated	50	2000	2	1.63	1.63	5010445003592
BRADS1650SS	16 Gauge	50	Stainless Steel	0° glue laminated	50	2000	2	1.68	1.68	5010445004711
BRADS1664	16 Gauge	64	Galvanised	0° glue laminated	50	2000	2	2.04	2.04	5010445003608

Angled brad nails

16 gauge angled brad nails for all second fix applications

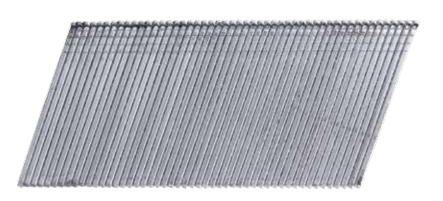





Product information

Features and benefits

- Smooth nail shank for low penetration resistance
- Chisel point to prevent timber from splitting
- T type head provides a concealed fixing
- The glue laminated collation ensures a lack of residue in the tool and on the work surface
- Available in galvanised or stainless steel for higher corrosion protection
- Compatible with all leading manufactures 16ga tools

Applications

- Installation of woodan facades and other external trim applications
- Installation of soffits and other roof finishing elements
- Installation of timber decorative elements on facades and other timber structures

Corresponding products

 R-RAWL-A2064 Gas powered second fix nailer

Base materials

- Timber
- Plywood
- Chipboard
- Wood

Index	Cours	Length	Finish	Collation	Fasteners per strip	Carton quantity	Fuel cells per carton	Box Weight	Outer Weight	EAN
ilidex	Gauge	[mm]	Fillisii	Collation	[pcs]	[pcs]	[pcs]	kg	kg	EAN
BRADS2032	16 Gauge	32	Galvanised	20° glue laminated	50	2000	2	1.18	1.18	5010445004667
BRADS2038	16 Gauge	38	Galvanised	20° glue laminated	50	2000	2	0.60	0.60	5010445004674
BRADS2045	16 Gauge	45	Galvanised	20° glue laminated	50	2000	2	0.80	0.80	5010445004681
BRADS2050	16 Gauge	50	Galvanised	20° glue laminated	50	2000	2	1.72	1.72	5010445004698
BRADS2050SS	16 Gauge	50	Stainless Steel	20° glue laminated	50	2000	2	1.76	1.76	5010445004728
BRADS2064	16 Gauge	64	Galvanised	20° glue laminated	50	2000	2	1.00	1.00	5010445004704





R-RAWL-GP1 Fuel cell

Fuel cell for use in R-RAWL-WW90CH gas powered nailer





Product information

Features and benefits

- Clean Propane & Butane mixiture reduces carbon residue
- High quality propellant for increased performance
- Contains a fully synthetic oil for lubricating the tool
- Functions from -5°C to 35°C to elongate the work site capability of the system
- Compatible with leading manufactures tools

Applications

 Powering gas powered timber framing nailers

Corresponding products

• R-RAWL-WW90CH Gas powered framing nailer

Index	Fuel type	Lubrication	Size	Weight	Operating temperatures	Efficiency	Box Weight	Outer Weight	EAN
index	ruettype	Lubrication	[mm]	[9]	[°C]	[shots]	kg	kg	LAN
R-RAWL-GP1	Propane & Butane	Yes	165	40	-5 - 35	min. 1100	0.09	0.09	5906675274256

R-KIT-WW90/SC40

Cleaning kit for gas powered tools.



Product information

Features and benefits

- Contains cleaning detergent, lubricating oil, cloth, gloves and cleaning guide for gas tools
- Allows to perform a standard cleaning and maintenance of the tool
- Provide send user with means to keep the tools in perfect working conditions
- The kit is not included with the tool.

Applications

- Maintenance and basic service of gas powered tools
- Wooden pallets and packaging manufacturing

Corresponding products

- R-RAWL-WW90CH Gas powered framing nailer
- R-RAWL-SC40II Gas powered steel and concrete nailer

Item	EAN	Content
R-KIT-WW90/SC40	5906675096964	Cleaning detergent, Lubricating oil, Cleaning cloth, Gloves, Cleaning guide

RAWLPLUG® PNEUMATIC TOOLS

Coil nailers, strip nailers, roofing nailer, positive placement nailer, steel and concrete nailer

The wide range of Rawlplug pneumatic nailers have been designed and manufactured to the highest standards. We are constantly focused on delivering performance tools that can be used in the construction industry. All of our tools are CE certified.



R-RAWL-PN-3490 Pneumatic framing nailer

Pneumatic paper strip nailer for timber framing, roofing and other timber applications







Certificate C E

Product information

Features and benefits

- Nail range from 50mm to 90mm for wide range of applications
- Adjustable exhaust port is an improtant safety feature when operating in areas where other persons amy be affected by the exhausted air and particles
- Depth of drive adjustment provides fine tuning installation depth in an type of substrate material and application
- Removable no mark nose for protecting the timber surface. Especially important when securing timber cladding or facades
- More powerfull than gas powered equivalent of the same specification. Up to 10% more power ensures outstanding performance in all applications and timber types

Applications

- Timber frame stud work in timber framing industry
- Installation of battens and sheating in roof construction
- Installation of wooden facades
- Installation of timber flooring and terraces

Corresponding products

- SPG-DPK paper collated nails nails without fuel cells
- SPG-DRG paper collated nails nails without fuel cells
- SPG-DRK paper collated nails nails without fuel cells

Base materials

- Timber
- Plywood
- Chipboard
- Wood

Set includes

- R-RAWL-PN-3490 Pneumatic framing nailer
- Spare gasket set
- Operating and Safety manual
- Safety glasses and ear plugs
- Case

Packaging



Index	Power source	zine	Magazine capacity	Maga- zine angle	Weight	Fastener diameter range		Noise	Maximum pressure	Ope- rating pressure		Dimensions	Box Weight	Outer Weight	EAN
	Jource	type	[nail]	[degree]	[kg]	[mm]	[mm]	[dB]	[bar]	[bar]	type	[mm]	kg	kg	
R-RAWL-PN-3490	Pneu- matic	Strip	88	34	3.8	2.8 - 4.1	50 - 90	94	8	5-7	D head nail	420x125x370	7.19	14.37	5906675252049

SPG-DPG Paper collated nails without fuel cells

Smooth shank galvanised nails for timber framing, roofing and other timber applications







Certificate C E

Product information

Features and benefits

- 34° angle collation with a clipped head ensures the nail is compatible with all leading manufactures tools
- Waxed paper collation avoids deterioration in wet conditions
- Paper tape collation ensures that no collating material is left on the work site
- Special coating at the base of the shank improves the drive of the nail and ensures a secure fixing
- Diamond point prevents the timber from splitting
- Minimum of 10 microns zinc coating provides great corrosion protection
- A wide variety of combinations of nail coatings and finishes allows everyone to find the right solution for a particular application

Applications

- Timber frame stud work in timber framing industry
- Installation of battens and sheating in roof construction
- Installation of soffits and other roof finishing elements
- Installation of wooden facades

Corresponding products

• R-RAWL-PN-3490 Pneumatic framing nailer

Base materials

- Timber
- Plywood
- Wood
- · Chipboard

Packaging



Index	Fastener diameter	Length	Head	Shank	Finish	Protection	Collation	Fasteners per strip	Carton quantity	Box Weight	Outer Weight	EAN
ilidex	[mm]	[mm]	type	type	FIIIISII	Protection	Collation	[pcs]	[pcs]	kg	kg	EAN
SPG-DPG-2875	2.8	75	Clipped head	Smooth	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	28.71	28.71	5906675096964
SPG-DPG-3163	3.1	63	Clipped head	Smooth	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	13.38	13.38	7777777777
SPG-DPG-3175	3.1	75	Clipped head	Smooth	Silver Galvanised		34° paper laminated	44	2200	10.61	10.61	7777777777

	Fastener diameter	Length	Head	Shank				Fasteners per strip	Carton quantity	Box Weight	Outer Weight	
Index	[mm]	[mm]	type	type	Finish	Protection	Collation	[pcs]	[pcs]	kg	kg	EAN
SPG-DPG-3190	3.1	90	Clipped head	Smooth	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	2200	12.20	12.20	5906675024639
SPG-DPGH-3190	3.1	90	Clipped head	Smooth	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	1100	6.1	6.1	5906675024646
SPG-DPK-2851	2.8	51	Clipped head	Smooth	Bright	Minimum 10m	34° paper laminated	44	3300	9.08	9.08	5906675048833
SPG-DPK-2863	2.8	63	Clipped head	Smooth	Bright	Minimum 10m	34° paper laminated	44	3300	11.09	11.09	5906675048772
SPG-DPK-2875	2.8	75	Clipped head	Smooth	Bright	Minimum 10m	34° paper laminated	44	3300	12.96	12.96	5906675048796
SPG-DPK-3175	3.1	75	Clipped head	Smooth	Bright	Minimum 10m	34° paper laminated	44	2200	10.27	10.27	5906675050331
SPG-DPK-3190	3.1	90	Clipped head	Smooth	Bright	Minimum 10m	34° paper laminated	44	2200	12.17	12.17	5906675023724
SPG-DRG-2851	2.8	51	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	8.74	8.74	5906675023731
SPG-DRG-2863	2.8	63	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	10.77	10.77	5906675024653
SPG-DRG-3163	3.1	63	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	18.68	18.68	5906675048819
SPG-DRG-2875	2.8	75	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	3300	12.71	12.71	5906675024677
SPG-DRG-3175	3.1	75	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	2200	10.27	10.27	5906675024684
SPG-DRG-3190	3.1	90	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	2200	12.22	12.22	5906675023748
SPG-DRGH-2851	2.8	51	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	1100	8.74	2.823	5906675025476
SPG-DRGH-2863	2.8	63	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	1100	10.77	3.45	5906675025483
SPG-DRGH-3175	3.1	75	Clipped head	Ring	Silver Galvanised	Minimum 10 microns	34° paper laminated	44	1100	10.27	4.7455	5906675024691
SPG-DRK-2851	2.8	51	Clipped head	Ring	Bright	Minimum 10m	34º paper laminated	44	3300	8.84	8.84	5906675048673
SPG-DRK-2863	2.8	63	Clipped head	Ring	Bright	Minimum 10m	34° paper laminated	44	3300	10.85	10.85	5906675025490
SPG-DRK-2875	2.8	70	Clipped head	Ring	Bright	Minimum 10m	34° paper laminated	44	3300	12.53	12.53	5906675071084
SPG-DRK-3163	3.1	63	Clipped head	Ring	Bright	Minimum 10m	34º paper laminated	44	2200	18.68	18.68	5906675071060
SPG-DRK-3175	3.1	75	Clipped head	Ring	Bright	Minimum 10m	34° paper laminated	44	2200	10.32	10.32	5906675025513
SPG-DRK-3190	3.1	90	Clipped head	Ring	Bright	Minimum 10m	34° paper laminated	44	2200	12.07	12.07	5906675023755

R-RAWL-PNP-130 Pneumatic framing nailer

Pneumatic plastic strip nailer for timber framing, roofing and other timber applications







Certificate C E

Product information

Features and benefits

- Nail range from 90mm to 130 mm widens the range of typical applications
- Removable no mark nose for protecting the timber surface. Especially important when securing timber cladding or facades
- Magazine capacity of 50 nails provides less time needed for reloading
- Adjustable exhaust port is an improtant safety feature when operating in areas where other persons amy be affected by the exhausted air and particles
- Depth adjustment allows the operator to easily adjust the deptj that the nail is driven into timber to produce a precise and secure fixing
- Simplicity of tool design ensures low maintenance and high reliability

Applications

- Timber frame stud work in timber framing industry
- Installation of battens and sheating in roof construction
- Installation of wooden facades
- Manufacturing of timber standarised structure like Timber frame houses or roof elements

Corresponding products

- R-GPG plastic collated nails
- R-RAWL-C50 or C50-10 Oil lubricated compressor
- R-RAWL-C100-P Oil lubricated compressor

Base materials

- Timber
- Plywood
- Chipboard
- Wood

Set includes

- R-RAWL-PNP-130 Pneumatic framing nailer
- Spare gasket set
- Operating and Safety manual
- · Safety glasses

Index	Power source	Magazine type	capacity	Magazine angle [degree]		Fastener dia- meter range [mm]	Fastener length range [mm]			Operating pressure [bar]		Outer Weight kg	EAN
R-RAWL-PNP-130	Pneuma- tic	Strip	50	21	5.6	3.3 - 4.2	90 - 130	94	9	5-7	7.92	7.92	5906675251981

R-GPG Plastic collated nails

Smooth shank bright nails for timber framing, roofing and other timber applications







Certificate (E

Product information

Features and benefits

- 21° degree collation angle ensures the nail is compatible with all leading manufacturers tools
- Plastic collation provides protection from deterioration by weather conditions or high humidity
- Full round head provides a secure fixing and high pull through value
- Diamond point prevents the timber from splitting

Applications

- Timber frame stud work in timber framing industry
- Installation of battens and sheating in roof construction
- Installation of soffits and other roof finishing elements
- Installation of wooden facades

Corresponding products

• R-RAWL-PNP-130 Pneumatic framing nailer

Base materials

- Timber
- Plywood
- Wood
- · Chipboard

Index	Fastener diameter	Length	Head type	Head diameter	Shank	Finish	Collation	Carton quantity	Pallet	Box Weight	Outer Weight	EAN
IIIGEX	[mm]	[mm]	nead type	[mm]	type	Fillisii	Cottacion	[pcs]	quantity	kg	kg	EAN
R-GPG-38100	3.8	100	Full Round	8.5	Smooth	Bright	Plastic strip	1250	50	9.09	9.09	5906675103204
R-GPG-38120	3.8	120	Full Round	8.5	Smooth	Bright	Plastic strip	1250	50	13.69	13.69	5906675266688
R-GPG-38130	3.8	130	Full Round	8.5	Smooth	Bright	Plastic strip	1250	50	14.87	14.87	5906675266718
R-GPS-38100	3.8	100	Full Round	8.5	Twist	Bright	Plastic strip	1250	50	9.15	9.15	5906675103211
R-GPS-38120	3.8	120	Full Round	8.5	Twist	Bright	Plastic strip	1250	50	12.89	12.89	5906675266695
R-GPS-38130	3.8	130	Full Round	8.5	Twist	Bright	Plastic strip	1250	50	13.88	13.88	5906675266725

R-RAWL-PN Pneumatic coil nailers

Pneumatic coil nailer for manufacturing pallets, wooden packaging and othe timber product







Certificate C E

Product information

Features and benefits

- Nail range from 25mm to 57mm widens the range of typical applications
- Adjustable exhaust port is an improtant safety feature when operating in areas where other persons amy be affected by the exhausted air and particles
- Ergonomic design and well balanace for higher comfort of daily use and reduced risk of injury
- Nail cover from magazine to nose for safety of operation
- Very low recoil value provides great improvement in operators comfort of using the tool
- Magazine capacity up to 400 nails significantly reduces reload time

Applications

- Manufacturing pallets, packaging and external trim
- Installation of timber flooring and terraces

Corresponding products

- R-GDP wire collated nails
- R-RAWL-C50 Oil lubricated compressor
- R-RAWL-C24 Oil lubricated compressor

Base materials

- Timber
- Chipboard
- Plywood
- Wood

Set includes

- R-RAWL-PN-57 Pneumatic coil nailer
- Spare gasket set
- Operating and Safety manual
- Safety glasses

Index	Power source	Maga- zine	Magazi- ne angle	Weight	Fastener diameter range	Fastener length range	Noise level	Maxi- mum pressure	Operating pressure	Magazine capacity	Dimensions	Box Weight	Outer Weight	EAN
		type	[degree]	[kg]	[mm]	[mm]	[dB]	[bar]	[bar]	[nail]	[mm]	kg	kg	
R-RAWL-PN-57	Pneumatic	Coil	16	2.5	2.1 - 2.3	25 - 57	94	8	5-7	300 - 400	285x135x285	3.63	18.14	5906675252124
R-RAWL-PN-70	Pneumatic	Coil	16	3.6	2.5 - 2.9	45 - 70	99	8	5-7	225 - 300	318x125x320	4.98	19.93	5906675252148
R-RAWL-PN-83	Pneumatic	Coil	16	3.7	2.5 - 3.3	50 - 83	101	8	5-7	225 - 300	349x129x313	5.38	21.54	5906675252162
R-RAWL-PN-90	Pneumatic	Coil	16	4.32	2.5 - 3.3	50 - 90	95.1	8	5 - 7	300	350x130x360	4.30	17.20	5906675097459

R-GDP Wire collated nails

Ring shank bright nails for timber framing, roofing and other timber applications







Product information

Features and benefits

- 16° angle of collation ensures the nail is compatible with all leading manufacturers tools
- Full round head provides a secure fixing and high pull through value
- Diamond point prevents the timber from splitting

Applications

- Fencing & gates manufacturing and installation
- Wooden pallets and packaging manufacturing

Corresponding products

- R-RAWL-PN-57 Pneumatic coil nailer
- R-RAWL-PN-70 Pneumatic coil nailer
- R-RAWL-PN-83 Pneumatic coil nailer

Base materials

- Timber
- Wood
- Plywood
- Chipboard

Index	Fastener diameter	Length	Head type	Head diameter	Shank	Finish	Collation	Carton quantity	Pallet	Box Weight	Outer Weight	EAN
illuex	[mm]	[mm]	пеац суре	[mm]	type	FIIIISII	Cottation	[pcs]	quantity	kg	kg	EAN
R-GDP-2132	2.1	32	Full round	6.1	Ring	Bright	Wire welded	16800	30	13.73	13.73	5906675025452
R-GDP-2138	2.1	38	Full round	6.1	Ring	Bright	Wire welded	12600	30	13.23	13.23	5906675266619
R-GDP-2155	2.1	55	Full round	6.1	Ring	Bright	Wire welded	10500	30	14.02	14.02	5906675266626
R-GDP-2555	2.5	55	Full round	6.1	Ring	Bright	Wire welded	9000	30	20.32	20.32	5906675266633
R-GDP-2560	2.5	60	Full round	6.1	Ring	Bright	Wire welded	7200	30	17.80	17.80	5906675266640
R-GDP-2570	2.5	70	Full round	6.1	Ring	Bright	Wire welded	7200	30	17.17	17.17	5906675266657
R-GDP-2880	2.8	80	Full round	7.5	Ring	Bright	Wire welded	4500	30	18.21	18.21	5906675266664

R-RAWL-PRN-45 Pneumatic roofing nailer

Pneumatic coil nailer for manufacturing pallets, wooden packaging and othe timber product







Certificate C E

Product information

Features and benefits

- Nail range from 22mm to 45mm provides wide range of application
- Very low recoil value provides great improvement in operators comfort of using the tool
- Tool free depth adjustment. The operator can easily adjust the depth that the nail is driven into timber to produce a precise fixing
- Ergonomic design and well balanace for higher comfort of daily use and reduced risk of injury
- Extremely lightWeight and manouverable which is an advantege when operating in areas with limited access
- Guide plate ensures the perpendicularity of the tool against the roof surface

Applications

- · Installation of felt roofing
- Installation of roofing foil and breather membranes

Corresponding products

- R-RAWL-C50 Oil lubricated compressor
- R-RAWL-C50-10 oil lubricated air compressor

Base materials

- Timber
- Plywood
- Wood
- · Chipboard

Set includes

- R-RAWL-PRN-45 Pneumatic roofing nailer
- Spare gasket set
- Operating and Safety manual
- Safety glasses

Index	Power source	ZIDE	Maga- zine angle	Weight	Fastener diameter range	Fastener length range	Noise level	Maxi- mum pressure	Ope- rating pressure	Maga- zine capacity	Dimensions	Box Weight	Outer Weight	EAN
			[degree]	[kg]	[mm]	[mm]	[dB]	[bar]	[bar]	[nail]	[mm]	kg	kg	
R-RAWL-PRN-45	Pneuma- tic	Coil	16	2.6	3.05	22 - 45	95.6	8	5-7	120	283x118x269	3.58	17.88	5906675097466



RAWLPLUG® COMPRESSORS

The Rawlplug compressor range was meticulously developed to align with our pneumatic tools.

Our compressors are designed for both DIY and semi-professional use. All models benefit from easy-start motors, simple to adjust regulators, quick-release air coupling and readily accessible drain valves. Using the highest quality parts in the manufacture of each unit ensures our equipment is powerful, compact and extremely reliable and efficient

R-RAWL-C100-P Oil lubricated compressor

100 litre tank portable air compressor for professional and industrial applications







Certificate (E

Product information

Features and benefits

- Best quality electronic components ensure stable working conditions and low operating cost
- Brushless motor with a power of 3 HP provides the best performance and low maintenance. Brushless technology is the most reliable drive type used in powe rtools and mobile equipment providing low damage risk and maintenance cost
- Oil lubricated pump with direct drive provides high performance and stable operation of the compressor
- Built in intake filter to avoid damage in transport and storage
- Robust wheels and additional rubber feet for better stability

Applications

- Powering nailers, wrenches and other pneumatic tools
- Suitable for all applications requiring increased amount of compressed air
- Proffesional and industrial applications like powering torque wrenches or high power nailers

Corresponding products

- R-RAWL-PMC-38 Pneumatic joist hanger nailer
- R-RAWL-PN-3490 Pneumatic framing nailer
- R-RAWL-PN-57 Pneumatic coil nailer

Index	Air output	Cord length	Lubrica-	Maximum pressure		Operating pressure	Operating temperatures	Power	Tank size	Box Weight	Outer Weight EAN	
index	[L/min]	[m]	tion	[bar]	[dB]	[bar]	[°C]	[HP]	[L]	kg	kg	LAIT
R-RAWL-C100-P	360	3	Yes	10	95	5 - 7	0 - +35	3	100	66.00	66.00	5906675322315

R-RAWL-C20-PRO Oil lubricated compressor

Oil lubricated compressor R-RAWL-C20-PRO for demanding construction applications







Certificate C E

Product information

Features and benefits

- Best quality electronic components ensure stable working conditions and low operating cost
- Brushless motor with a power of 2,5 HP provides the best performance and low maintenance. Brushless technology is the most reliable drive type used in powe rtools and mobile equipment providing low damage risk and maintenance cost
- Oil lubricated pump with direct drive provides high performance and stable operation of the compressor
- Built in intake filter to avoid damage in transport and storage
- Robust wheels and additional rubber feet for better stability
- Stabile output air parameters thanks to tank pressure manometer and precise pressure adjust regulator
- Provides high efficiency thanks to durable 10
 Bar max pressure pump and double standard
 3/8" quick coupling
- High efficiency pump and durable design can be used to power more than one tool at the same time

Applications

- Powering nailers, wrenches and other pneumatic tools
- Suitable for all applications requiring increased amount of compressed air
- Proffesional and industrial applications like powering torque wrenches or high power nailers

Corresponding products

- R-RAWL-PMC-38 Pneumatic joist hanger nailer
- R-RAWL-PN-3490 Pneumatic framing nailer
- R-RAWL-PN-57 Pneumatic coil nailer
- R-RAWL-PN-70 Pneumatic coil nailer
- R-RAWL-PN-83 Pneumatic coil nailer
- R-RAWL-PN-90 Pneumatic coil nailer
- R-RAWL-PNP-130 Pneumatic framing nailer

Index	Air output	Cord length	Lubrica-	Maximum pressure	essure level pressure		Operating Power temperatures		Tank size	Box Weight	Outer Weight	EAN
IIIUEX	[L/min]	[m]	tion	[bar]	[dB]	[bar]	[°C]	[HP]	[1]	kg	kg	LAN
R-RAWL-C20-PRO	300	3	Yes	10	72	5-8	0 - +35	1,8	20	21.00	22.00	

R-RAWL-C24 Oil lubricated compressor

24 Litre tank portable air compressor for semi proffesional and DIY applications







Certificate C E

Product information

Features and benefits

- Best quality electronic components ensure stable working conditions and low operating cost
- Brushless motor with a power of 2.25 HP.
 Brushless technology is the most reliable
 drive type used in powe rtools and mobile
 equipment providing low damage risk and
 maintenance cost
- Oil lubricated pump with direct drive provides high performance and stable operation of the compressor
- Built in intake filter to avoid damage in transport and storage. The design prevents the most frequent type of damage and reduces service cost
- Robust wheels and additional rubber feet for better stability

Applications

- Powering nailers, wrenches and other pneumatic tools
- DIY, craftsman and hobby applications
- Dedicated to DIY applications like inflating bike or car tires

Corresponding products

- R-RAWL-PN-3490 Pneumatic framing nailer
- R-RAWL-PSC40 Pneumatic steel and concrete nailer
- R-RAWL-PMC-38 Pneumatic joist hanger nailer

Set includes

- R-RAWL-C24 Oil lubricated compressor
- Operating and Safety manual

Index	Tank size	Lubrication	Maximum		Noise level	Weight Box Weight		Outer Weight	EAN	
Index	[L]		[HP]	[L/min]	pressure	[dB]	[kg]	kg	kg	EAN
R-RAWL-C24	24	Oil lubricated	2,25	200	8 Bar	95	25	24.12	24.12	5906675057736

R-RAWL-C50 Oil lubricated compressor

50 Litre tank portable air compressor for semi proffesional and DIY applications







Certificate (E

Product information

Features and benefits

- Best quality electronic components ensure stable working conditions and low operating
- Brushless motor with a power of 2.25 HP. Brushless technology is the most reliable drive type used in powe rtools and mobile equipment providing low damage risk and maintenance cost
- Oil lubricated pump with direct drive provides high performance and stable operation of the compressor
- Built in intake filter to avoid damage in transport and storage. The design prevents the most frequent type of damage and reduces service cost
- Robust wheels and additional rubber feet for better stability

Applications

- Supplying proffesional equipment with compressed air
- Craftsman and DIY applications requireing increased amount of compressed air
- Dedicated to DIY applications like inflating bike or car tires

Corresponding products

- R-RAWL-PN-3490 Pneumatic framing nailer
- R-RAWL-PSC40 Pneumatic steel and concrete nailer
- R-RAWL-PMC-38 Pneumatic joist hanger nailer

Set includes

- R-RAWL-C50 Oil lubricated compressor
- · Operating and Safety manual

Index	Tank size	Lubrication	Power	Air output	output Maximum Noise level Weigh		Weight	Box Weight	Outer Weight	EAN
index	[1]		[HP]	[L/min]	pressure	[dB]	[kg]	kg	kg	EAN
R-RAWL-C50	50	Oil lubricated	2,25	200	8 Bar	95	34	33.22	33.22	5906675057743



R-RAWL-C50-10 Oil lubricated compressor

50 litre tank portable air compressor for proffesional applications







Certificate C E

Product information

Features and benefits

- Best quality electronic components ensure stable working conditions and low operating
- Brushless motor with a power of 2.5 HP.
 Brushless technology is the most reliable
 drive type used in powe rtools and mobile
 equipment providing low damage risk and
 maintenance cost
- Oil lubricated pump with direct drive provides high performance and stable operation of the compressor
- Built in intake filter to avoid damage in transport and storage
- Robust wheels and additional rubber feet for better stability

Applications

- Powering nailers, wrenches and other pneumatic tools
- Suitable for all applications requiring increased amount of compressed air
- Proffesional and industrial applications like powering torque wrenches or high power nailers

Corresponding products

- R-RAWL-PMC-38 Pneumatic joist hanger nailer
- R-RAWL-PN-3490 Pneumatic framing nailer
- R-RAWL-PN-57 Pneumatic coil

Index	Air output	Cord length	Lubrica- tion	Maximum pressure	Noise level	Operating pressure	Operating temperatures	Power	Tank size	Box Weight	Outer Weight	EAN
index	[L/min]	[m]		[bar]	[dB]	[bar]	[°C]	[HP]	[1]	kg	kg	EAN
R-RAWL-C50-10	244	3	Yes	10	95	5 - 7	0 - +35	3	50	50.00	50.00	5906675322339

R-RAWL-C6 Oil free compressor

6 Litre tank portable air compressor for hobby and DIY applications





Certificate (E

Product information

Features and benefits

- Brushless motor with a power of 2.25 HP.
 Brushless technology is the most reliable
 drive type used in powe rtools and mobile
 equipment providing low damage risk and
 maintenance cost
- Ol free pump ensures outstanding perfomance in any working conditions.
 Thanks to the oil free solution the device is able to work in any place and position. It is also safe to transport providing lack of leaking and environmental hazard
- Built in intake filter to avoid damage in transport and storage
- Extremely lightWeight and portable. Low Weight and compact design allows for using the device in most inaccessible areas comfprtably and with providing high level of safety.

Applications

- Supplying compressed air for small stapler and nailing guns
- DIY, craftsman and hobby applications
- Dedicated to DIY applications like inflating bike or car tires

Set includes

- R-RAWL-C6 Oil free compressor
- Operating and Safety manual

Index	Tank size	Lubrication	Power	Air output	Maximum	Noise level	Weight	Box Weight	Outer Weight	EAN
Index	[L]		[HP]	[L/min]	pressure	[dB]	[kg]	kg	kg	
R-RAWL-C6	6	None	1,5	160	8 Bar	68	9	10.97	10.97	5906675034041

RAWLPLUG® STAPLERS

The wide range of Rawlplug staplers allows you to choose the perfect stapler for specific work. The most vital characteristics and features are: ergonomic shapes, ease of use and structural firmness.

In addition, all our staplers are free of any maintenance requirements, ensuring fast and precise work with a variety of materials - perfect for both heavy finishing works and decorative works that do not require heavy a workload.



RT-KGR0010 Hand stapler – Trade, 6-10 mm

Lightweight stapler for flat wire staples; Professional line; Type 140; 6-10 mm









Product information

Features and benefits

- Steel body for increased impact resistance
- Folding handle for easy transportation
- Two-component non-slip handle increases productivity and comfort
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clin
- Flat spring prolongs life and reduces recoil
- "Try me" packaging allows free access to all the features

Applications

- Designed for difficult tasks
- Used for upholstery and decorative work

Base materials

- Chipboard
- Fabric
- Oriented Strand Board
- Wood
- Timber
- Plastic

Corresponding products

• RT-KSS013 Staples RL 13

Packaging



	Range Index	Q	uantity [unit	:s]		Weight [kg]			
Index		Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KGR0010	6-14	1	10	40	0.35	3.50	14.00	5906675381596	Double blister

RT-KGR0011 Hammer Tacker, 6-10 mm

Roofing hammer tacker; Professional line; Type 140; 6-10 mm









Product information

Features and benefits

- Steel body for increased impact resistance
- A view on the staple count allows you to quickly check the number of staples in the clip
- "Try me" packaging allows free access to all the features
- Ergonomic handle increases operator comfort

Applications

 Designed for attaching tar paper roofing and fixing foil and roof insulation

Base materials

- Chipboard
- Oriented Strand Board
- Timber
- Wood
- Plasterboard
- Exotic Wood

Corresponding products

- RT-KSS140 Staples RL 140
- RT-KSS1400 Staples RL 140 -box
- RT-KSS140 Stainless steel staples RL 140

Packaging



	Range Index	Q	uantity [unit	s]		Weight [kg]			
Index		Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KGR0011	6-14	1	10	20	1.10	11.00	22.00	5391512821494	Double blister

RT-KGR0012 Hammer Tacker – Roofing 6-10 mm

Roofing hammer tacker for fine wire staples; Type 13; 6-10 mm









Product information

Features and benefits

- Steel body for increased impact resistance
- A view on the staple count allows you to quickly check the number of staples in the clin
- "Try me" packaging allows free access to all the features
- Ergonomic handle increases operator comfort

Applications

 Designed for attaching tar paper roofing and fixing foil and roof insulation

Base materials

- Chipboard
- Oriented Strand Board
- Timber
- Wood
- Plasterboard
- · Exotic Wood

Corresponding products

• RT-KSS013 Staples RL 13

Packaging



Range	Dange	Q	uantity [unit	:s]		Weight [kg]			
Index	Ralige	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KGR0012	6-14	1	10	10	0.60	6.00	6.00	5906675381619	Double blister

RT-KGR0013 Hammer Tacker – Roofing pro 6-14 mm

Heavy duty hammer tacker for flat wire staples; Professional line; Type 140; 6-14 mm









Product information

Features and benefits

- Ergonomic handle increases operator comfort
- Steel body for increased impact resistance
- A view on the staple count allows you to quickly check the number of staples in the clip
- "Try me" packaging allows free access to all the features

Applications

 Designed for attaching tar paper roofing and fixing foil and roof insulation

Base materials

- Oriented Strand Board
- Timber
- Wood
- Plasterboard
- Exotic Wood

Corresponding products

- RT-KSS140 Staples RL 140
- RT-KSS1400 Staples RL 140 box
- RT-KSS140 Stainless steel staples RL 140

Packaging



	Range Index	Bango	Q	uantity [unit	s]		Weight [kg]		-	
		Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type	
		[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
	RT-KGR0013	6-14	1	10	10	0.90	9.00	9.00	5906675381602	Double blister

RT-KGR0014 Hand stapler – Trade, 6-10 mm

Lightweight stapler for flat wire staples; Professional line; Type 140; 6-10 mm









Product information

Features and benefits

- Folding handle for easy transportation
- Two-component non-slip handle increases productivity and comfort
- · Steel body for increased impact resistance
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil
- "Try me" packaging allows free access to all the features

Applications

 For heavy-duty carpentry, construction and finishing work

Base materials

- Chipboard
- Exotic Wood
- Plasterboard
- Oriented Strand Board
- Timber
- Wood

Corresponding products

- RT-KSS1400 Staples RL 140 -box
- RT-KSS140 Staples RL 140
- RT-KSS140 Stainless steel staples RL 140

Packaging



	Range	Q	uantity [unit	:s]		Weight [kg]			
Index	Range	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KGR0014	6-14	1	10	40	0.48	4.81	19.24	5391512826116	Double blister

RT-KGR0024 Hand stapler – Universal Trade 3 in 1, 6-14 mm

Heavy duty stapler for flat wire staples; Professional line; Type 140; 6-14 mm









Product information

Features and benefits

- Wide range of uses: 6-14 mm staples, 14 mm nails, 14 mm pins
- Folding handle for easy transportation
- Two-component non-slip handle increases productivity and comfort
- Smoothly adjustable punching force allows for adjusting the driving force to the type of material
- Steel body for increased impact resistance
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil

Applications

 For heavy-duty carpentry, construction and finishing work

Base materials

- Chipboard
- Plasterboard
- Oriented Strand Board
- Timber
- Wood
- Plywood

Corresponding products

- RT-KSS00814 RL8 Nails 14 mm
- RT-KSS00914 RL9 Pins 14 mm
- RT-KSS140 Staples RL 140
- RT-KSS1400 Staples RL 140 box
- RT-KSS140 Stainless steel staples RL 140

Packaging




Range	Q	uantity [unit	:s]		Weight [kg]				
Index		Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KGR0024	6-14	1	10	20	0.78	7.80	15.54	5391512826123	Double blister

RT-KGR0027 Hand stapler – Cable tacker, 10-14 mm

Specialized professional stapler for parabolic staples; Type 36; 10-14 mm









Product information

Features and benefits

- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- Steel body for increased impact resistance
- Flat spring prolongs life and reduces recoil
- "Try me" packaging allows free access to all the features
- Folding handle for easy transportation
- Two-component non-slip handle increases productivity and comfort
- Two-step adjustable punching force allows for adjusting the driving force to the type of material

Applications

 Attaching low voltage cables, up to 24V

Base materials

- Chipboard
- Fabric
- Plasterboard
- · Oriented Strand Board
- Wood
- Timber

Corresponding products

• RT-KSS00714 RL36 Staples 14 mm

Packaging



	Range	Q	uantity [unit	:s]		Weight [kg]			
Index	Ralige	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KGR0027	6-14	1	10	10	0.45	4.50	4.50	5906675381626	Double blister

RT-KGR0029 Hand stapler - Powerful easy shot 3 in 1, 6-14 mm

Durable stapler for fine wire staples with a unique pre-tension trigger mechanism and aluminium body; universal line; Type 53; 6-14 mm









Product information

Features and benefits

- Trigger switch allows for shooting with a trigger
- Wide range of use: 6-14 mm staples, 14 mm nails, 14 mm pins
- Folding handle for easy transport
- Two-component non-slip handle increases productivity and comfort
- Two-step adjustable punching force allows for adjusting the driving force to the type of aterial
- Aluminum body, lightweight, impact--resistant housing
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip

Corresponding products

- RT-KSS00814 RL8 Nails 14 mm
- RT-KSS00914 RL9 Pins 14 mm
- RT-KSS53 Staples RL 53

Applications

- Designed for difficult tasks that require comprehensive tools, offering both stapling and nailing
- Used for upholstery and decorative work

Base materials

- Oriented Strand Board
- Plywood
- Fabric
- TimberPlastic
- Chipboard

Packaging



Range	Dange	Q	uantity [unit	:s]		Weight [kg]					
Index	Kange	Range	Kange	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg				
RT-KGR0029	6-14	1	10	20	0.84	8.40	16.88	5906675083353	Double blister		

RT-KGR0030 Hand stapler – Easy shot 3 in 1, 6-14 mm

Lightweight stapler for fine wire staples with a unique pre-tension trigger mechanism and strong plastic body; universal line; Type 53; 6-14 mm









Product information

Features and benefits

- Trigger switch allows for shooting with a trigger
- Wide range of uses: 6-14 mm staples, 14 mm nails, 14 mm pins
- Folding handle for easy transportation
- Two-component non-slip handle increases productivity and comfort
- Two-step adjustable punching force allows for adjusting the driving force to the type of material
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil

Applications

- Designed for difficult tasks that require comprehensive tools, offering both stapling and nailing
- Used for upholstery and decorative work

Base materials

- Oriented Strand Board
- Plastic
- Plywood
- Timber
- ChipboardFabric

Corresponding products

- RT-KSS00914 RL9 Pins 14 mm
- RT-KSS00814 RL8 Nails 14 mm
- RT-KSS53 Staples RL 53

Packaging



	Range Index	Q	uantity [unit	:s]		Weight [kg]			
Index		Range	Units in set	Inner	Outer	Unit	Inner	Outer	EAN
	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KGR0030	6-14	1	10	20	0.50	5.00	10.00	5906675083360	Double blister

RT-KGR0031 Hand stapler - 3 in 1, 6-14 mm

Heavy duty stapler for fine wire staples, suitable for pins and brads; Universal line; Type 53; 6-14 mm









Product information

Features and benefits

- Wide range of uses: 6-14 mm staples, 14 mm nails, 14 mm pins
- Folding handle for easy transportation
- Two-component non-slip handle increases productivity and comfort
- Smoothly adjustable punching force allows for adjusting the driving force to the type of material
- Steel body for increased impact resistance
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil

Applications

- Designed for difficult tasks that require comprehensive tools, offering both stapling and nailing
- Used for upholstery and decorative work

Base materials

- Laminate
- Plastic
- Plywood
- TimberWood
- Fabric

Corresponding products

- RT-KSS00814 RL8 Nails 14 mm
- RT-KSS00914 RL9 Pins 14 mm
- RT-KSS53 Staples RL 53

Packaging



Range	Bango	Q	uantity [unit	:s]		Weight [kg]				
Index		Kange	Units in set	Inner	Outer	Unit	Inner	Outer EAN	EAN	Packaging type
	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg			
RT-KGR0031	6-14	1	10	20	0.91	9.06	18.11	5391512821517	Double blister	

RT-KGR0032 Hand stapler – Household, 6-14 mm

Heavy duty stapler for fine wire staples; Universal line; Type 53; 6-14 mm









Product information

Features and benefits

- Folding handle for easy transportation
- Two-component non-slip handle increases productivity and comfort
- Smoothly adjustable punching force allows for adjusting the driving force to the type of material
- Steel body for increased impact resistance
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil
- "Try me" packaging allows free access to all the features

Applications

- Designed for difficult tasks
- Used for upholstery and decorative work

Base materials

- Chipboard
- Fabric
- Oriented Strand Board
- Plastic
- Plywood
- Wood

Corresponding products

• RT-KSS53 Staples RL 53

Packaging



	Pango	Q	uantity [unit	:s]		Weight [kg]			
Index	Index Range	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KGR0032	6-14	1	10	20	0.64	6.37	12.73	5391512826093	Double blister

RT-KGR0033 Hand stapler – Extra light, 6-14 mm

Extra light stapler for fine wire staples, suitable for home decorating; Universal line; Type 53; 6-14 mm









Product information

Features and benefits

- ABS body, lightweight impact-resistant housing
- Folding handle for easy transportation
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil
- "Try me" packaging allows free access to all the features
- Two-step adjustable punching force allows for adjusting the driving force to the type of material

Applications

 Used for upholstery and decorative work

Base materials

- Fabric
- Oriented Strand Board
- Plywood
- Cardboard
- Timber
- Plastic

Corresponding products

• RT-KSS53 Staples RL 53

Packaging



	Range Index	Q	uantity [unit	:s]		Weight [kg]			
Index		Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KGR0033	6-14	1	10	40	0.30	3.00	12.00	5906675381589	Double blister

RT-KGR0034 Hand stapler - Compact 3 in 1, 6-14 mm

Compact stapler for fine wire staples, Universal line Type 53, 6-14 mm









Product information

Features and benefits

- Compact steel body for increased impact resistance
- Two-step adjustable punching force allows for adjusting the driving force to the type of material
- · Folding handle for easy transport
- Two-component non-slip handle increases productivity and comfort
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil
- "Try me" packaging allows free access to all the features

Applications

- Designed for difficult tasks that require comprehensive tools, offering both stapling and nailing
- Used for upholstery and decorative work

Base materials

- Laminate
- Plastic
- Plywood
- TimberWood
- Fabric

Corresponding products

- RT-KSS00814 RL8 Nails 14 mm
- RT-KSS00914 RL9 Pins 14 mm
- RT-KSS53 Staples RL 53

Packaging



		Range	Quantity [units]				Weight [kg]			
	Index		Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
		[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
ĺ	RT-KGR0034	6-14	1	10	40	0.40	4.00	16.00	5906675381633	Double blister

RT-KGR0053 Hand stapler – Easy squeeze, 6-10 mm

Lightweight stapler for fine wire staples, suitable for home decorating; Universal line; Type 53; 6-10 mm









Product information

Features and benefits

- Folding handle for easy transportation
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil
- "Try me" packaging allows free access to all the features
- ABS body, lightweight impact-resistant housing

Applications

- Used for upholstery and decorative work
- For office use

Base materials

- Fabric
- Oriented Strand Board
 - Plywood
- Cardboard

Packaging



Corresponding products

• RT-KSS53 Staples RL 53

	Bango	Q	uantity [unit	s]		Weight [kg]			Packaging type
Index	Range	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	
	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KGR0053	6-14	1	10	40	0.23	2.33	9.30	5391512821463	Double blister

RT-KGR0055 Hand stapler - Office, 6-10 mm

Lightweight stapler for fine wire staples, suitable for office use; Universal line; Type 53; 6-10 mm









Product information

Features and benefits

- A special stand makes it possible to use as an office stapler
- Folding handle for easy transportation
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- ABS body, lightweight impact-resistant housing
- Flat spring prolongs life and reduces recoil
- "Try me" packaging allows free access to all the features

Applications

 Used for office jobs, upholstery and decorative work

Base materials

- Paper
- Chipboard
- Fabric
- Timber
- Wood

Corresponding products

• RT-KSS53 Staples RL 53

Packaging



	Range	Quantity [units]				Weight [kg]			
Index	Kalige	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KGR0055	6-14	1	10	10	0.20	2.00	2.00	5906675083377	Double blister

RT-KGR00153 Hand stapler – Handy, 6-10 mm

Heavy duty universal stapler for fine wire staples; Universal line; Type 53; 6-10 mm









Product information

Features and benefits

- Folding handle for easy transportation
- Two-component non-slip handle increases productivity and comfort
- Steel body for increased impact resistance
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil
- "Try me" packaging allows free access to all the features

Applications

- Designed for difficult tasks
- Used for upholstery and decorative work

Base materials

- Chipboard
- Fabric
- Oriented Strand Board
- Wood
- Timber
- Plastic

Corresponding products

• RT-KSS53 Staples RL 53

Packaging



	Range	Q	uantity [unit	s]		Weight [kg]			Packaging type
Index	Kaliye	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	
	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KGR0153	6-14	1	10	40	0.52	5.21	20.86	5391512826086	Double blister

RT-KGR0162 Hand stapler, 6in1 heavy duty

Durable and comfortable stapler for various applications









Product information

Features and benefits

- Compact aluminium body for increased impact resistance
- Two position driving force adjustment allows to precisely set the depth of the staple in various materials
- Folding handle for easy transport
- Two-component non-slip handle increases productivity and comfort
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- · Flat spring prolongs life and reduces recoil
- "Try me" packaging allows free access to all the features

Corresponding products

- RT-KSS00814 RL8 Nails 14 mm
- RT-KSS00914 RL9 Pins 14 mm
- RT-KSS53 Staples RL 53

Applications

- Designed for difficult tasks that require comprehensive tools, offering both stapling and nailing
- Used for upholstery and decorative work
- Temporary fixings
- Construction and industrial appplications

Base materials

- Paper
- Cardboard
- Chipboard
- Timber
- Wood
- Plastic

Packaging



- RT-KSS013 Staples RL 13
- RT-KSS014 Staples RL 14
- RT-KSS007 Staples RL 36

	Range	Quantity [units]				Weight [kg]			
Index	Range	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KGR0162	6-14	1	10	10	0.20	2.00	2.00	5906675409849	Double blister

RAWLPLUG® STAPLES, NAILS AND PINS

An important part of Rawlplug's range consits of our high quality stapling accessories. A wide range of staples, nails and pins for a variety of applications for the most demanding jobs.



Rawlplug staples compatibility profile





Stapler type	Staple type	Size [mm]	Staple type	Size [mm]
	RA ¹	WLPLUG		
RT-KGR0024	RL140	6-14	RLS	14 14
RT-KGR0014	RL140	6-10		
RT-KGR0011	RL140	6-10		
RT-KGR0029	RLS3	6-14	RLS RLS	14 14
RT-KGR0030	RLSS	6-14	RLS	14 14
	RLS3	6-14	PE.36	10-14
RT-KGR0160	FE 140	6-14	RLS	14
	RL13	6-14	RLE	14
RT-KGR0031	RL53	6.14	RLD	14
RI-KGR0031	RLS3	6-14	RLE	14
RT-KGR0032	RLS3	6-14		
RT-KGR0153	RL53	6-10		
RT-KGR0055	RLS3	6-10		
RT-KGR0053	RLS3	6-10		
RT-KGR0028	RLISC	8	RL14C	8
		RAPID		
R153E	RLS3	4-8		
R453E	RLS3	6-14	RLE	14
R353E	RLS3	6-14		
R34	RL140	6-14		
R33	RL13	6-14		
R14	RL140	6-8		
R13E	RL13	4-10		
ALU953	RLSS	6-14	RLS	14
ALU940	RL140	6-14		
R311	RL140	6-12		
R11	RL 140	6-10		

Stapler type	Staple type	Size [mm]	Staple type	Size [mm]
	STANLE	Y / BOSTIT	CH	
ST10	RLS3	6-10		
ST14	RLS3	6-14	2	15
TR45	RL53	6-8		
TR100	RL140	6-14		
TR200	RL140	6-14	RES	15
TRE500	RL140	6-14	200	15
Hobby 8/ Pro8	RLSS	4-8	RLSS	6-8
Vario 14/ HD14	RLSS	4-8	RES	15
Рго 14	RL 140	6-14		
Hammer Tacker	RL140	6-10		
TGD	RLSE	6-12		
T200/ TR100M2	RL140	6-14		
T58/ ET58E/ T15/ T15C	RLII	6-14		
T5-8 OC, P4- 8, PC4000	RL11	6-14		
HB308	RL11	6-10		
H30	RL11	6-10		
	١	IOVUS		
J01 A	I DANN	6-8		
J01 AS	П	6-8	RLZE	9
J02 AL	DMN	6-14	RL36	14
J08 XX/J09		4-8	RLSS	4-8
XX	RL13	4-8 4-8	RL980	4-8
J-16 EADHG	DMN	6-14	RL13	6-14
2 70 27 107 10	RL140	6-14	RLD	15
J-18	IMN.	6-18	RL9	15
J-19 EADHG	I I	6-14	AL13	6-14
J 19 LADING	R1140	6-14	RLS	15
J-19 S	n RLZE	9-11		
J-19 L	Ü	10-14		

Stapler	Staple	Size	Staple	Size
type	type	[mm]	type	[mm]
J-58 Trig	RLSG	4-14		
J-021H	RL13	4-6		
J-031G	FIL140	6-10		
J-105 EADHG		6-14 6-14	RLU RLU	6-14 15
J-100/J-102A	III.	6-14		
J-118C	II.	12-18		
J-145	I	8-18		
J-155/J-155 A	DANN RLE	8-18 20		12-18
J-165 EAD	I I	8-20	NLS RLS	15-20
J-165 EC	RLEGG	15-25	NL9	15-25
J-170/J-172 A	FILECE	18-30	RLD	15-30
J-316 A	I I I	6-16		
J-328 EC	RLSCE	15-28	N.S	15-30
J-330 C	RLOSE	15-30		
J-340 C	RLEGS	15-30		
	_	RROW		
ETF50PBN	RL140	6-14	NL9	15
ETN50	RL140	6-14		
ET50	RL140	6-14		
ETC50	RL140	6-14		
JT21M/CM	RLS3	6-10		
HT50P	RL140	6-14		
HT30	RLSG	6-10		
T18	∩ Razi	9-11		
T27	RLS3	6-10		
T25	RL16	12-14	RLT	12-14
T2025	RLIS	12-14	RLT	12-14
T50	RL140	6-14		
T50PBN	[] RL140	6-14	RUS	15

IORAWLPLUG®



Stapler type	Staple type	Size [mm]	Staple type	Size [mm]
LITO	_	BOSCH 4-8		
HT8	[] R.S			45
HT14	is.	4-14	RL9	15
HMT53	8.55	4-8		
HMT57 PTK14E	11 140	6-10 6-14		15
PINI4E		8-14	RLS	15
PTK19E	RLSD RLSDS	12-18 15-185	RES	15 8-18
PTK23E		12-18		12-23
PTK28E	П	12-14		12-25
	1637	ESCO	******	
Esco10	RL53	15-35		
Esco11	RL 140	6-10		
Esco19	RE13	4-6		
Esco20	Ü	4-8		
Esco30		6-14		
Esco40	П	6-14		
Esco50	RESI	6-14	Ris	15
Esco58	iks	4-14	RLS	13
	RLSI			45
Esco90	RLSS	6-14	RL9	15
Esco100	RLSS	8-20		
Esco200	RLSOS	12-25	RLS	15-25
Compacta 530	RLSS	4-14		
ET53031	RL 53	6-14	RLS	15
HT53055	RLSS	6-14	RLD .	15
Derby530	[R.53]	6-8		
DLT530	FIL53	4-18		
DLT606	FLEGG	12-25		
		AEG		
Powertac 14	DMN	6-14		
Powertac 16	RL900	6-14	RLO	15
Powertac 18	FIL53	8-18	I I	8-18
Powertac 30	RLGM	18-30	RLD	15-30
Powertac 19	ELAGO	8-18 12-18	NL9	20
Powershot 8000	RL140	6-14	RL9	15
Powershot 5700	RL140	6-14	NLS	15
Powershot 5650	II.	6-10		
9000	RL140	6-14	RL9	15
9100	SCHED / F	6-14	RL9	15
A300E	SCHER / L	8-12	KANO	
Maxi10/	ik.ss	4-10		
Mek10 Mek6/16/20	R.53	6-14		
Mek88	RL 140	12-14		
Mek116	ik.ss	6-14		15
Mek1020	RLSS	8-14	RL9	15-20
Mini4	RLSS	4-8	RC9	.5 25
	RL53			

Stapler type	Staple type	Size [mm]	Staple type	Size [mm]
Нурег14	RLSS	4-10	200	15
H100	III.	6-14		
Нурег16	RL140	6-14		
Super17	RL140	6-14		
		KWB		
MT10	RLS3	6-10		
MT16N	RLS3	8-16 15	RES	15
MT20N	RLS3	8-20 15-18,5	\ R0	15-20
PT8	RLS3	4-8		
PT10	RLS3	4-10		
PT14	RLS3	6-14 15	No.	20
PT18		8-18 18,5	No.	15
TT14	П	6-14	\	15
TT18	RLST	8-20	RLD	15-20
TT26	RESI	12-25	N.3	15-25
TN30	RLOSS	15-30	RL9	
TT42R	Rt9	15-30		
	RLOOS	LUX		
Deko-Tac	RLID	4-8	RLSS	4-8
реко-тас	RLSS	4-8	RLS3	4-8
		ETABO		
TaE1819/ 1919	DIAN RLD	8-18 20	RLEGE	12-18
TaA19	EMN RLS	8-18 20	RLOS	12-18
TaE2019/ 2020	III	8-18 20	RLEGG	12-18
TaM3030/ 3034	DIAN RES	8-18 20	II.	12-18
		RANHA	_	
70101	Ü	6-8		
70004	Ü	4-8		
70005,	Ü	6-14		
70006, 70102	R.A	APESCO		
Z-140	RL140	6-14	RLS	15
853-D/T/P	∏ RLSI	4-8		
813-D/T/P	RL13	4-8		
A11	RL140	6-10		
HD-140	RL140	8-14		
913	RL13	4-6		
140EL	RL 140	6-14	200	15
191EL	RLEOS	15-30	NC.9	15-35
180EL	RLD	15-30		
181EL	RLP	15-30		
53EL	RLS3	4-16	RES	15
13EL	RL13	6-14	NL9	15
CT45	n RL20	8-10	RL27	10
CT60	n RLSs	10-14	RLT	12-14
Z1-P, Z1	RL13	4-8	II.	6-8
Z2-P, Z2	RL13	6-14 15	RESHO	6-14

RT-KSS53 Staples RL 53

The most popular fine wire staples; Universal line; Type 53; Ideal for working with textiles





Product information

Features and benefits

- Galvanized corrosion-resistant surface
- Made of tempered wire, it is not bent whenapplied to hard surfaces
- Narrow staple with a thickness 0.75 mm, notvisible while fixing fabric and carpets

Applications

• Narrow staple for decorative and upholstery work

Base materials

- Chipboard
- Fabric
- Exotic Wood
- · Oriented Strand Board
- Timber
- Wood

Corresponding products

- RT-KGR0029 Hand stapler Powerful easy shot 3 in 1, 6-14 mm
- RT-KGR0030 Hand stapler Easy shot 3 in 1, 6-14 mm
- RT-KGR0031 Hand stapler 3 in 1, 6-14 mm

Packaging





				l		antity [un	its]	,	Weight [kg	1		
Index	Туре	Height	Length	Thickness	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
		[mm]	[mm]	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KSS05306	RL53	6	11.3	0.75	1000	6	120	0.09	0.51	10.28	5391512821524	Double blister
RT-KSS053065000	RL53	6	11.3	0.75	5000	1	10	0.53	0.53	5.30	5906675381190	Paper box
RT-KSS05308	RL53	8	11.3	0.75	1000	6	120	0.59	5.85	11.70	5391512821531	Double blister
RT-KSS053085000	RL53	8	11.3	0.75	5000	1	10	0.63	0.63	6.30	5906675381206	Paper box
RT-KSS05310	RL53	10	11.3	0.75	1000	6	120	0.11	0.66	13.10	5391512821548	Double blister
RT-KSS053105000	RL53	10	11.3	0.75	5000	1	10	0.75	0.75	7.50	5906675381213	Paper box
RT-KSS05312	RL53	12	11.3	0.75	1000	6	120	0.12	0.74	14.82	5391512821555	Double blister
RT-KSS053125000	RL53	12	11.3	0.75	5000	1	10	0.87	0.87	8.70	5906675381220	Paper box
RT-KSS05314	RL53	14	11.3	0.75	1000	6	120	0.14	0.84	16.80	5391512821562	Double blister
RT-KSS053145000	RL53	14	11.3	0.75	5000	1	10	0.98	0.98	9.80	5906675381237	Paper box

RT-KSS140 Staples RL 140

Flat wire staples; Professional line; Type 140; Ideal for working with insulation material and thin plastic





Product information

Features and benefits

- Wide 1.25mm flat wire staple provides lack of damages whist installing delicate materials
- Made of tempered wire, it is not bent when applied to hard surfaces
- Galvanized or stainless steel corrosionresistant surface

Applications

 Professional wide staple for roofers designed for repairs and construction work

Base materials

- Exotic Wood
- Oriented Strand Board
- Plasterboard
- Timber
- Wood
- Plywood

Corresponding products

- RT-KGR0011 Hammer Tacker, 6-10 mm
- RT-KGR0014 Hand stapler Trade, 6-10 mm
- RT-KGR0024 Hand stapler 3 in 1, 6-14 mm

Packaging







					Quantil	ty [units]	Weig	ht [kg]		
Index	Туре	Height	Length	Depth	Вох	Outer	Вох	Outer	EAN	Packaging type
		[mm]	[mm]	[mm]	[pcs]	[pcs]	kg	kg		
RT-KSS14006	RL140	6	10,5	1.25	1250	6	0.82	9.82	5391512821579	Double blister
RT-KSS140065040	RL140	6	10,5	1.25	5040	6	5.45	5.45	5391512826130	Paper box
RT-KSS14008	RL140	8	10,5	1.25	1250	6	0.94	0.94	5391512821586	Double blister
RT-KSS140085040	RL140	8	10,5	1.25	5040	6	6.50	6.50	5391512821654	Paper box
RT-KSS14010	RL140	10	10,5	1.25	1250	6	1.07	1.07	5391512821593	Double blister
RT-KSS140105040	RL140	10	10,5	1.25	5040	6	7.50	7.50	5391512821661	Paper box
RT-KSS14012	RL140	12	10,5	1.25	1250	6	1.21	1.21	5391512821609	Double blister
RT-KSS140125040	RL140	12	10,5	1.25	5040	6	8.66	8.66	5391512821678	Paper box
RT-KSS14014	RL140	14	10,5	1.25	1250	6	6.71	6.71	5391512821616	Double blister
RT-KSS140145040	RL140	14	10,5	1.25	5040	6	9.78	9.78	5391512826147	Paper box
RT-KSS14010SS	RL140	10	10	1.25	1500	5	0.19	0.94	5906675328256	Double blister

RT-KSS013 Staples RL 13

Staples of thin wire; Type 13, ideal for decorating





Product information

Features and benefits

- Made of tempered wire, which prevents bending when applied to hard surfaces
- Narrow staple, with a thickness of 0.7 mm, is not visible when fixing fabric and carpets.

Applications

• Narrow staple for decorative and upholstery work

Base materials

- Chipboard
- Fabric
- Exotic Wood
- · Oriented Strand Board
- Timber
- Wood

Corresponding products

- RT-KGR0010 Hand stapler
 Standard, 6-10 mm
- RT-KGR0012 Hammer Tacker
 - Roofing 6-10 mm

Packaging





				-L:-l	Qu	antity [un	its]	,	Weight [kg	1		
Index	Туре	Height	Length	Thickness	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
		[mm]	[mm]	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KSS01306	RL13	6	11.3	0.7	1000	1	10	0.12	0.12	1.20	5906675089072	Double blister
RT-KSS013062500	RL13	6	11.3	0.7	2500	1	10	0.28	0.28	2.80	5906675381169	Paper box
RT-KSS01308	RL13	8	11.3	0.7	1000	1	10	0.13	0.13	1.30	5906675153599	Double blister
RT-KSS013082500	RL13	8	11.3	0.7	2500	1	10	0.30	0.30	3.00	5906675381176	Paper box
RT-KSS01310	RL13	10	11.3	0.7	1000	1	10	0.14	0.14	1.40	5906675271552	Double blister
RT-KSS013102500	RL13	10	11.3	0.7	2500	1	10	0.33	0.33	3.30	5906675381183	Paper box

RT-KSS00714 RL36 Staples 14 mm

Parabolic staples for cables





Product information

Features and benefits

- Galvanized corrosion-resistant surface
- Made of tempered wire, which prevents bending when applied to hard surfaces

Applications

• Designed for attaching low voltage cables max. 24 V

Base materials

- Exotic Wood
- Wood
- Timber
- Fabric
- Laminate
- Plywood

Corresponding products RT-KGR0160 Hand stapler – 6 in 1, 6-14 mm

Packaging



		Height	Langth	Thickness		antity [un	its]	,	Weight [kg	1		
Index	Туре	Height	Length	Inickness	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
		[mm]	[mm]	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KSS00714	RL36	14	7.7	1.25	1500	6	60	0.10	0.60	3.60	5906675086774	Double blister

RT-KSS00814 RL8 Nails 14 mm

Brad nails for quick installation





Product information

Features and benefits

- · Galvanized corrosion-resistant surface
- Made of tempered wire, which prevents bending when applied to hard surfaces

Applications

• Suitable for mounting panels and skirting boards

Base materials

- Chipboard
- Exotic Wood
- · Oriented Strand Board
- Plasterboard
- Timber
- Wood

Corresponding products

- RT-KGR0029 Hand stapler – Powerful easy shot 3 in 1, 6-14 mm
- RT-KGR0030 Hand stapler
 Easy shot 3 in 1, 6-14 mm
- RT-KGR0031 Hand stapler 3 in 1, 6-14 mm
- RT-KGR0160 Hand stapler 6 in 1, 6-14 mm
- RT-KGR0024 Hand stapler
 - Universal Trade 3 in 1, 6-14 mm

Packaging



		Heiskt	Lanath	Thiskness		antity [un	its]	,	Weight [kg	1		
Index	Туре	Height	Length	Thickness	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
		[mm]	[mm]	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KSS00814	RL8	14	2	1.25	1000	6	60	0.14	0.84	8.4	5391512821623	Double blister

RT-KSS00914 RL9 Pins 14 mm

Pins for connecting thin strips





Product information

Features and benefits

- Galvanized corrosion-resistant surface
- Made of tempered wire, which prevents bending when applied to hard surfaces

Applications

 Pins for finishing work: nailing strips, boards, soffits, etc.

Base materials

- Exotic Wood
- Chipboard
- Laminate
- · Oriented Strand Board
- Plasterboard
- Wood

Corresponding products

- RT-KGR0029 Hand stapler Powerful easy shot 3 in 1, 6-14 mm
- RT-KGR0030 Hand stapler Easy shot 3 in 1, 6-14 mm
- RT-KGR0031 Hand stapler 3 in 1, 6-14 mm
- RT-KGR0160 Hand stapler 6 in 1, 6-14 mm
- RT-KGR0024 Hand stapler Universal Trade 3 in 1, 6-14 mm

Packaging



		Haiabb	Longth	Thickness		antity [un	its]	,	Weight [kg	1		
Index	Туре	Height	Length	Inickness	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
		[mm]	[mm]	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-KSS00914	RL9	14	1.25	1000	1000	6	60	0.13	0.78	4.68	5391512821630	Double blister

RAWLPLUG® GLUE GUNS

Rawlplug® glue guns are known for their high quality and modern design solutions, providing comfortable work and high performance through a fast dual heater system that reduces the warm-up time.

The use of special tips prevents an uncontrolled flow of adhesive during operation. All our guns can be used in work where speed and precision are important.



RT-GG-180 Professional glue gun 180W

A durable glue gun with fast warm-up and high efficiency







Product information

Features and benefits

- Designed for 11-12 mm adhesives
- Mechanical feeding of adhesive with adjustable trigger stroke allows for precise adjustment of the glue feed
- Balance hook keeps the gun nozzle down when the gun is hanging loose
- 4-finger trigger ensures precise glue application
- The switch provides more security and com- fort of use
- The dual heating system ensures a very short warm-up time and high performance
- Replaceable nozzles for different operating modes
- The wide stand ensures a very stable position when the gun is not in use

Applications

- Production line
- Packing
- Installing pipe insulation
- Installation works
- Installation
- Repairs

Base materials

- Plastic
- Wood
- Plywood
- Metal Sheet & Profiles
- Natural Stone
- Ceramics

Corresponding products

- RT-GS-C Glue sticks for bonding cardboard
- RT-GS-E Extra strong glue sticks
- RT-GS-G Glue sticks with glitter
- RT-GS-K Color glue sticks
- RT-GS-P Glue sticks for bonding plastic

Packaging



Technical data

Index	Features	Power	Efficiency	Glue size	Working temp.	Heating time	Cord lenght	Voltage	Frequency
index	reacures	[w]	[g/min]	[mm]	[°C]	[min]	[m]	[v]	[Hz]
RT-GG-180 / RT-GG-180-UK	EU plug / UK plug	18 (180)	33	11-12	193	2	1.72	230	50

	(Quantity [units	5]		Weight [kg]			
Index	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[pcs]	[pcs]	[pcs]	[kg]	[kg]	[kg]		
RT-GG-180	1	1	6	1.22	1.22	7.33	5906675092423	Box
RT-GG-180-UK	1	1	6	1.22	1.22	7.33	5906675325958	Box

RT-GG-080 Universal glue gun 80W

Glue gun with a wide range of applications including assembly and repair







Product information

Certificate

Features and benefits

- Designed for 11-12 mm adhesives
- Mechanical feeding of adhesive allows for the precise dosage
- Balance hook keeps the gun nozzle down when the gun is hanging loose
- 4-finger trigger ensures precise glue application
- Wide folding stand provides greater stability for the gun while standing
- Special nozzle prevents leakage of adhesive
- Silicone lining along the nozzle prevents burns

Applications

- Repairs
- Installation works
- Woodworking
- Installation
- Installing pipe insulation
- Sealing

Base materials

- Plastic
- Plasterboard
- Plywood
- Metal Sheet & Profiles
- Ceramics
- Glass

Corresponding products

- RT-GS-W Glue sticks for bonding wood
- RT-GS-U Universal glue sticks
- RT-GS-S Glue sticks for sanitary use
- RT-GS-P Glue sticks for bonding plastic
- RT-GS-M Set of universal and extra strong glue sticks

Packaging



Technical data

Index	Features	Power	Efficiency	Glue size	Working temp.	Heating time	Cord lenght	Voltage	Frequency
ilidex	reacules	[w]	[g/min]	[mm]	[°C]	[min]	[m]	[v]	[Hz]
RT-GG-080 / RT-GG-080-UK	EU plug / UK plug	11 (80)	27	11-12	193	5	1.72	230	50

		Quantity [units	5]		Weight [kg]			
Index	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[pcs]	[pcs]	[pcs]	[kg]	[kg]	[kg]		
RT-GG-080	1	6	12	0.58	3.48	7.00	5906675092409	Double blister
RT-GG-080-UK	1	6	12	0.58	3.48	7.00	5906675325941	Double blister

RT-GG-055 Glue gun 55W

Small gun for everyday use and finishing works









Product information

Features and benefits

- Designed for 11-12 mm adhesives
- Mechanical feeding of adhesive allows precise dosage
- Lightweight and ergonomic design makes it easy to use
- Folding stand allows for safe gun placement during work
- Special nozzle prevents leakage of adhesive
- Silicone lining along the nozzle prevents
 burns

Applications

- Installation
- SealingRepairs
- Upholstery
- Decor
- Floral arrangements

Base materials

- Plastic
- Wood
- Plywood
- Metal Sheet & Profiles
- Natural Stone
- Ceramics

Corresponding products

- RT-GS-C Glue sticks for bonding cardboard
- RT-GS-E Extra strong glue sticks
- RT-GS-G Glue sticks with glitter
- RT-GS-K Color glue sticks
- RT-GS-M Set of universal and extra strong glue sticks

Packaging



Technical data

Index	Features	Power	Efficiency	Glue size	Working temp.	Heating time	Cord lenght	Voltage	Frequency
index	reacures	[w]	[g/min]	[mm]	[°C]	[min]	[m]	[v]	[Hz]
RT-GG-055 / RT-GG-055-UK	EU plug / UK plug	7 (55)	16	Ø 11-12	193	6	1.72	230	50

	(Quantity [units	5]		Weight [kg]			
Index	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[pcs]	[pcs]	[pcs]	[kg]	[kg]	[kg]		
RT-GG-055	1	12	24	0.41	10.00	20.00	5906675092393	Box
RT-GG-055-UK	1	12	24	0.41	10.00	20.00	5906675325934	Box

RAWLPLUG® GLUE STICKS

The Rawlplug® brand offers a wide range of glue sticks for hot applications. All our adhesives guarantee durable and strong connections, across various materials, thanks to the toxin-free, high resin content included.

We provide a wide range of products of different sizes and colors, meeting the needs of both professionals and DIYs.



RT-GS-U Universal glue sticks

Universal glue sticks for bonding the majority of commercially available materials





Product information

Features and benefits

- The 12 mm diameter allows the adhesive to be used in most adhesive guns available on the market
- Short curing time, 30-35 seconds, allows for quick work
- The length of 200 mm allows for a longer operating time on one glue stick
- The length of 100 mm allows for gluing in hard to reach places
- Transparent adhesive allows applying in many areas and layers
- Does not emit odor while working
- Resistant to temperature of -5°C, enabling operation at low temperatures
- Melting temperature of 170-210°C

Corresponding products

- RT-GG-055 Glue gun 55W
- RT-GG-080 Universal glue gun 80W
- RT-GG-180 Professional glue gun 180W

Applications

 Universal glue sticks for bonding the majority of commercially available materials

Base materials

- Cardboard
- Plastic
- Wood

Packaging







	Glue size	Lanakh	Q	uantity [uni	ts]		Weight [kg]			
Index	Giue size	Length	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-GS-U1	12	100	12	5	40	0.13	0.65	5.20	5906675145877	Double blister
RT-GS-U2	12	200	44	1	5	0.99	0.99	4.95	5906675145815	Double blister
RT-GS-U2B	12	200	10	1	15	0.23	0.23	3.41	5906675314815	Bag

RT-GS-C Glue sticks for bonding cardboard

Glue sticks for bonding cardboard and paper surfaces





Product information

Features and benefits

- The 12mm diameter allows the adhesive to be used in most adhesive guns available on the market
- Very short curing time, 8-12 seconds, allowing for quick work
- The length of 200 mm allows for a longer operating time on one glue stick
- Milky color of adhesive allows applying in many areas
- · Does not emit odor while working
- Resistance to temperature of 0°C, enabling operations at low temperatures
- Melting temperature of 170-210°C

Applications

 This glue stick is perfect for bonding cardboard and paper surfaces

Base materials

- Cardboard
- Paper

Corresponding products

- RT-GG-055 Glue gun 55W
- RT-GG-080 Universal glue gun 80W
- RT-GG-180 Professional glue gun 180W

Packaging





	Churcier		Q	uantity [uni	ts]		Weight [kg]			
Index	Glue size	Length	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[mm]	[pcs]	[pcs]	[pcs]	[kg]	[kg]	[kg]		
RT-GS-C2	12	200	44	1	5	1.02	1.02	5.11	5906675145716	Double blister
RT-GS-C2B	12	200	10	1	15	0.22	0.22	3.30	5906675314662	Bag

RT-GS-P Glue sticks for bonding plastic

Dedicated glue sticks for bonding any plastic materials





Product information

Features and benefits

- The 12mm diameter allows the adhesive to be used in most adhesive guns available on the market
- Very short curing time, 8-12 seconds, allowing for quick work
- The length of 200 mm allows for a longer operating time on one glue stick
- Milky color of adhesive allows applying in many areas
- · Does not emit odor while working
- Resistance to temperature of 0°C, enabling operations at low temperatures
- Melting temperature of 170-210°C

Applications

 This glue stick is perfect for bonding cardboard and paper surfaces

Base materials

- Cardboard
- Paper

Corresponding products

- RT-GG-055 Glue gun 55W
- RT-GG-080 Universal glue gun 80W
- RT-GG-180 Professional glue gun 180W

Packaging





Clus sin		ilue size Length -	Quantity [units]		Weight [kg]					
Index	Giue Size	Length	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[mm]	[pcs]	[pcs]	[pcs]	[kg]	[kg]	[kg]		
RT-GS-P2	12	200	44	1	5	1.01	1.01	5.04	5906675145778	Double blister
RT-GS-P2B	12	200	10	1	15	0.22	0.22	3.30	5906675314686	Bag

RT-GS-W Glue sticks for bonding wood

Glue sticks for bonding surfaces of wood, wood-based materials and leather





Product information

Features and benefits

- The 12 mm diameter allows the adhesive to be used in most adhesive guns available on the market
- Short curing time, 30-35 seconds, allows for quick work
- The length of 200 mm allows for a longer operating time on one glue stick
- Honey color of adhesive allows applying in many areas and layers
- · Does not emit odor while working
- Resistant to temperature of -5°C, enabling operation at low temperatures
- Melting temperature of 170-210°C

Applications

 For bonding wood surfaces, wood-based materials and leather

Base materials

- Wood
- Plywood
- Chipboard
- Oriented Strand Board

Corresponding products

- RT-GG-055 Glue gun 55W
- RT-GG-080 Universal glue gun 80W
- RT-GG-180 Professional glue gun 180W

Packaging





	Glue size Lengt		Quantity [units]			Weight [kg]				
Index	Glue Size	Length	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[mm]	[pcs]	[pcs]	[pcs]	[kg]	[kg]	[kg]		
RT-GS-W2	12	200	44	1	5	0.98	0.98	4.90	5906675145839	Double blister
RT-GS-W2B	12	200	10	1	15	0.22	0.22	3.30	5906675314822	Bag

RT-GS-S Glue sticks for sanitary use

Glue sticks for bonding sanitary materials and products, e.g. appliances, tiles and plastic materials and cables





Product information

Features and benefits

- The white color of the adhesive is ideally suited for use in a sanitary environment
- The 12 mm diameter allows the adhesive to be used in most adhesive guns available on the market
- Short curing time, 25-30 seconds, allows for quick work
- Does not emit odor while working
- The length of 200 mm allows for a longer operating time on one glue stick
- Resistant to temperature of 0°C, enabling operation at low temperatures
- Melting temperature of 170-210°C

Applications

 For bonding sanitary materials and products, e.g. appliances, tiles and plastic materials and cables

Base materials

- · Sanitary ceramics
- Ceramics
- Plastic

Corresponding products

- RT-GG-055 Glue gun 55W
- RT-GG-080 Universal glue gun 80W
- RT-GG-180 Professional glue gun 180W

Packaging





Glue size Le		Leagh	Quantity [units]			Weight [kg]				
Index	Giue size	Length	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-GS-S2	12	200	44	1	5	0.98	0.98	4.92	5906675145792	Double blister
RT-GS-S2B	12	200	10	1	15	0.22	0.22	3.30	5906675314693	Bag

RT-GS-E Extra strong glue sticks

Super strong glue sticks designed for gluing together heavy construction materials and metals





Product information

Features and benefits

- The 12mm diameter allows the adhesive to be used in most adhesive guns available on the market
- Short curing time, 35-40 seconds, allows for quick work
- The length of 200 mm allows for a longer operating time on one glue stick
- Honey color of adhesive allows applying in many areas and layers
- · Does not emit odor while working
- Resistance to temperature of -15°C, enabling operation at very low temperatures
- Melting temperature of 170-210°C

Applications

 Super strong glue stick allows gluing together heavy construction materials and metals

Base materials

- Metal sheet & profiles
- · High-density natural stone
- Glass

Corresponding products

- RT-GG-055 Glue gun 55W
- RT-GG-080 Universal glue gun 80W
- RT-GG-180 Professional glue gun 180W

Packaging







	Glue size Length		Quantity [units]			Weight [kg]				
Index	Glue Size	Length	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[mm]	[pcs]	[pcs]	[pcs]	[kg]	[kg]	[kg]		
RT-GS-E1	12	100	12	5	40	0.13	0.65	5.20	5906675145853	Double blister
RT-GS-E2	12	200	44	1	5	0.96	0.96	4.80	5906675145730	Double blister
RT-GS-E2B	12	200	10	1	15	0.23	0.23	3.46	5906675314679	Bag

RT-GS-M Set of universal and extra strong glue sticks

A set of universal and super strong glue sticks for bonding different materials





Product information

Features and benefits

- The 12 mm diameter allows the adhesive to be used in most adhesive guns available on the market
- Short curing time, 35-40 seconds, allows for quick work
- The length of 200 mm allows for a longer operating time on one glue stick
- Honey and transparent color of adhesive allows applying in many areas and layers
- · Does not emit odor while working
- Resistance to temperatures of -15°C, enabling operation at very low temperatures
- Melting temperature of 170-210°C

Applications

 A set of universal and super strong glue stick for bonding different materials

Base materials

- Metal sheet & profiles
- High-density natural stone
- Plastic
- Wood

Corresponding products

- RT-GG-055 Glue gun 55W
- RT-GG-080 Universal glue gun 80W
- RT-GG-180 Professional glue gun 180W

Packaging



	Glue size Le	Length	Quantity [units]			Weight [kg]				
Index	Giue Size	Length	Units in set	Inner	Outer	Unit	Inner	Outer	EAN	Packaging type
	[mm]	[mm]	[pcs]	[pcs]	[pcs]	kg	kg	kg		
RT-GS-M2	12	200	44	1	5	0.97	0.97	4.84	5906675145754	Double blister

NOTES



NOTES



More from Rawlplug

Efficacy in the hardest conditions
We are proud to present innovative fixing from the Bonded Anchors and Mechanical Anchors group designed for the heavy loads demanded by industrial construction. Among our products you will find unique solutions to enable you to achieve maximal amounts with any kind of substrate. Knowledge backed-up with experience guarantees the offectiveness of our fivere and the success of your investment. the effectiveness of our fixings and the success of your investment.

Durability and versatility

Our wide range of expansion plugs made of synthetic materials and metal, for low and medium loads, have been used for years for both industrial and residential construction. Incredibly durable FF1 from frame fixings group, universal in use 4ALL and UNO Plug, no. 1 on the UK market, are leading products of RAWLPLUG®'s offer in the field of Lightweight Fixings, designed with every substrate in mind.

Innovations in Energy Saving construction
As a leading producer of façade insulation fixings we would like to present to you our wide array of products used in energy saving constructions. The Reliability and simplicity of our solutions combined with their ease of installation make them the most popular and desired by professionals. We invite you to familiarize yourselves with our offer for Façade Insulations Fixings.

Excellent resistance for high loads

Thanks to our close cooperation with roof covering product producers, and our insight into the needs of investment contractors, our *Roofing Insulations Fixings* are one of the most popular among European roof fixing system producers. We invite cooperation from engineers, architects, and roof works contractors. And encourage you to try out our calculation software "ROOFIX" today.

Safety Certificate

Stepping towards the needs of customers, and increasing the general level of safety in closed spaces, we have created a protection system event of which in the combustion prevents fire and smoke from spreading. We invite you to acquaint with our offer for *Passive Fire Protection Systems*, which hold the European Conformity Assessment.

Guarantee of lasting quality
Thanks to our constant monitoring of the production
of assortments from our Foams, Sealants and Adhesives range
we guarantee the constant and repeatable quality of our products.
Their wide range of application possibilities and high efficiency has
enabled us to rank among the top 5 of companies in the construction chemistry industry for years.

Maximal weather resistance
Rawlplug® Fasteners guarantee reliability of connections and maximal weather resistance. Our products, thanks to the use of appropriate materials and adoption of modern anticorrosion coating, pass even the hardest tests, matching the expectations of the most demanding clients. In our rich offer of screws characterized by extraordinary ease of installation, one may find perfect kind of connection for any kind of material and substrate.

Save time and minimize costs

In our offer of *Direct Fastening Systems* you may find, among others, highly effective pneumatically and gas powered nailers with accessories, compressors and an innovative and ergonomic rebar tier. We invite you to familiarize yourselves with the capabilities of Rawlplug® tools, which can significantly increase the comfort and effectiveness of work at any construction site. of work at any construction site.

Maximal effect of optimal offer

Maximal effect or optimal offer in order to ease the application and proper use and installation of our products, we supplement the our assortment of fixings with a precisely composed offer of *Power Tool Accessories*. They include, among others, European-made drills of the highest quality, as confirmed with a Sichersafe certificate. We invite you to familiarize yourselves with our offer of accessories for professional installation techniques of the Rawlplug® brand.

Ergonomics for construction and at home

We offer high-quality **Stapling, Tacking and Gluing** tools that are recommended for both professionals and home DIY. Rawlplug's stapling tools are especially intended for construction, finishing works and repairs while our hot-melt adhesive system includes a new line of glue guns and glues for a wide range of applications - all of which are exceptionally easy to use and provide maximum efficiency and a high degree of flexibility for routine work

Unique and exclusive exposition

Rawlplug **POS Essential Offer** It is a unique and complete solution designed for product exposition in building wholesale and retail stores. The POS system is based on easily configurable rack components enhanced with expansive information elements and additional decorations, as well as a combination of individual packages in form of innovative Rawlplug Bag and cutting-edge cardboard boxes.



Trust & Innovation. Since 1919.



Years PRAWLPLUG®

Rawlplug Shanghai Trading Co., Ltd.

Unit 801, 233, Rushan Road Shanghai, P.R. China Tel:+86 189 1882 8527 Email: henry.yang@rawlplug.com Web: www.rawlplug.com

Koelner Hungária Kft

Jedlik Ányos út. 34 2330 Dunaharaszti Tel: + 36 (24) 520 400 Email: info@koelner.hu

POLAND

Rawiplug 5.A.
ul. Kwidzyńska 6C, 51-416 Wrocław
Tel: +48 (71) 3260 100
Tel: +48 (71) 37 26 111
Email: info@koelnerpolska.pl

Rawl Scandinavia AB

Email: info@rawlplug.se

UNITED STATES OF AMERICA

Rawlplug Inc. 225 West Washington Ste 2600 Chicago IL 60605, Tel.: + 1 302 658 7581 www.rawlplug.us

Koelner CZ s.r.o Palackého 1154/76A 702 00 Ostrava-Přívoz Tel: + 420 596 636A 397 Email: objednavky@rawlplug.cz Web: www.koelner.cz

INDIA Rawl India Services Private

Limited

Elmited
Prestige Meridian-1, M.G Road,
Sector -29, Bangalore, Karnataka India,
560001
Tel: +91 9650495828
Email: info@rawlplugindia.com
Web: www.rawlplug.com

RUSSIA

Koelner Trading KLD LLC

ul. Dzerzhinskogo 219 236034 Kaliningrad Tel: + 7 (4012)65 85 75 Email: info@koelner-trading.ru Web: www.koelner-trading.ru

UKRAINE

Koelner Ukraine LLC

Liviska Bichna, 6 Sokilnyky Pustomyty Dstr., Lviv Reg. 81130 Tel: + 380 (32) 2440 744 Email: koelner@koelner.ua Web: www.koelner.ua

FRANCE

RAWL France SAS

72-14 Rue Marc Seguin 77-290 Mitry-Mory Tel: + 33 (0) 1 6021 5020 Email: rawl@rawl.fr Web: www.rawlplug.fr

IRELAND

Rawlplug Ireland Ltd

Unit 10 Donore Business Park Donore Road Drogheda Co Louth A92 C522 Tel: + 353 (0) 41 9844 338 Email: sales@rawlplug.ie Web: www.rawlplug.ie

SINGAPORE

Rawlplug Singapore Pte. Ltd. Blk 302, #04-11, 25B Loyang Crescent

Loyang Offshore Supply Base Singapore 506817 Tel: + 65 9078 5220 Email: jacek.nowicki@rawlplug.com.sg Web: www.rawlplug.com

Rawlplug Middle East FZE P.O. Box 261024 Dubai, UAE Warehouse No.RA08BC01 Tel: + 971 (4) 8839 501 Email: dubai@rawlplug.co.uk Web: www.rawl.ae

Koelner Deutschland GmbH

Gmünder Str. 65 73614 Schorndorf Tel: +49 (0) 7181 977 72-0 Email: info@koelner-befestigung.de Web: www.rawlplug.com

UAB Koelner Vilnius

Žarijų g. 2 LT-02300, Vilnius Tel: + 370 (5) 2324 862 Email: koelner@koelner.lt Web: www.koelner.lt

SLOVAKIA

Koelner Slovakia s.r.o.

010 09 Zilina Tel: + 421 415 003 900 Email: objednavky@rawlplug.sk Web: www.koelner.sk Web: www.rawlplug.sk

UNITED KINGDOM

Rawlplug Ltd

Rawiptug Ltd Skibo Drive Thornliebank Industrial Estate Glasgow C46 8JR Tel: + 44 (0) 141 6387 961 Fax: + 44 (0) 141 6387 397 Email: rawltech@rawlplug.co.uk Web: www.rawlplug.com



Products catalogue

© RAWLPLUG®, 01.2019 INDEX: RM-CAT-DIR-FAST-EN